
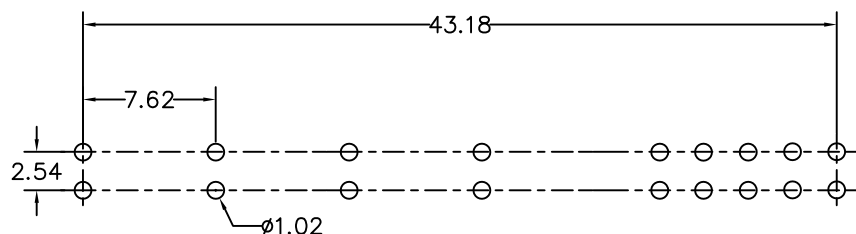


MATERIAL
HOUSING : PBT, UL94V-0
CONTACT : COPPER ALLOYS
PLATED : GOLD FLASH
COLOR : BLACK

SPECIFICATION
CURRENT: 3A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAGE: AC 1000V RMS

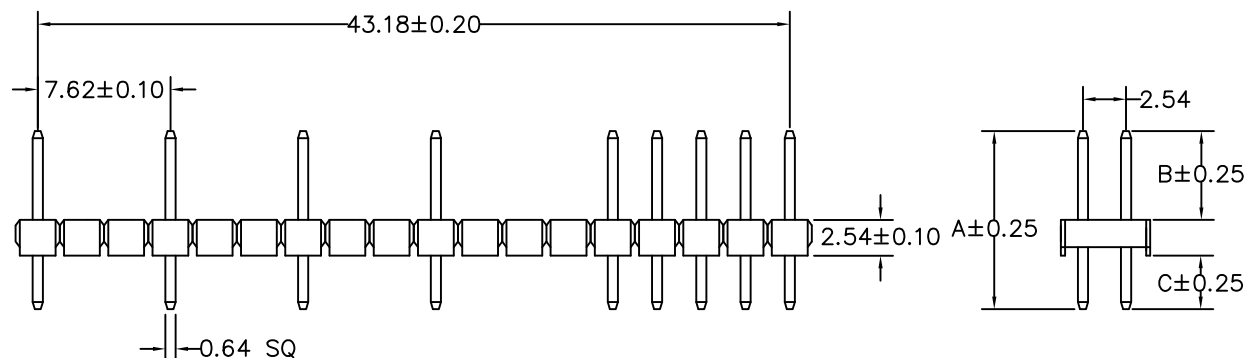

RECOMMENDED P.C.B LAYOUT

A: 11.68 mm B: 5.84 mm C: 3.30 mm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

H-D-2X18E18C-LF
SERIES | LEADFREE
| 36 WAY
DIP 180°

DESCRIPTION: