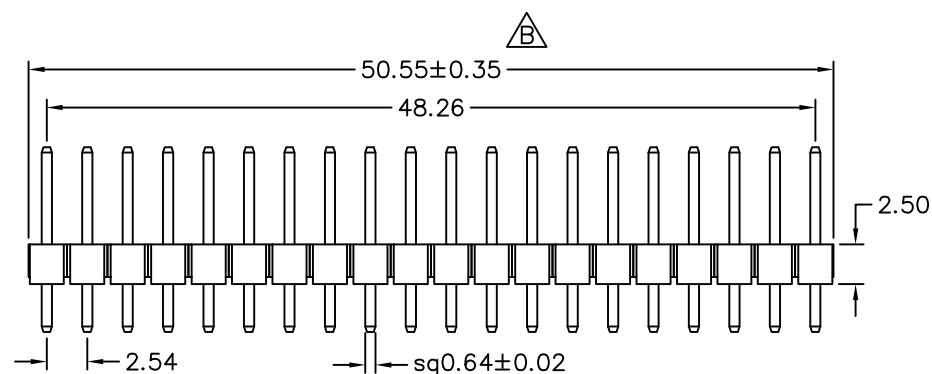
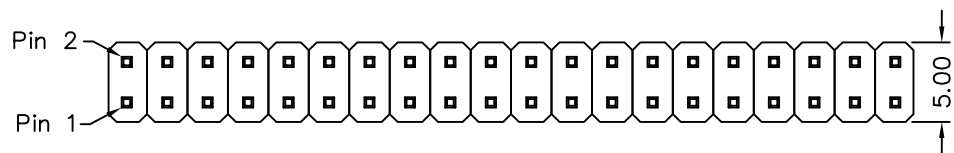


Recommended P.C.B Layout

MATERIAL
 Insulator : PBT UL94-V0
 Contact Pin : Brass

SPECIFICATION
 Current Rate : 8 AMP PER PIN(20AWG)
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

PPOJECTION

照片框


ORDER INFORMATION

H-D-2X20-LF
 SERIES LEADFREE
 40 WAY
 DIP 180°

DESCRIPTION:

紙箱側麥

ITEM NO:
Q' TY: 3000 PCS
N. W: 6.5 KGS
G. W: 7.5 KGS
MEAS: 33*27*23CM

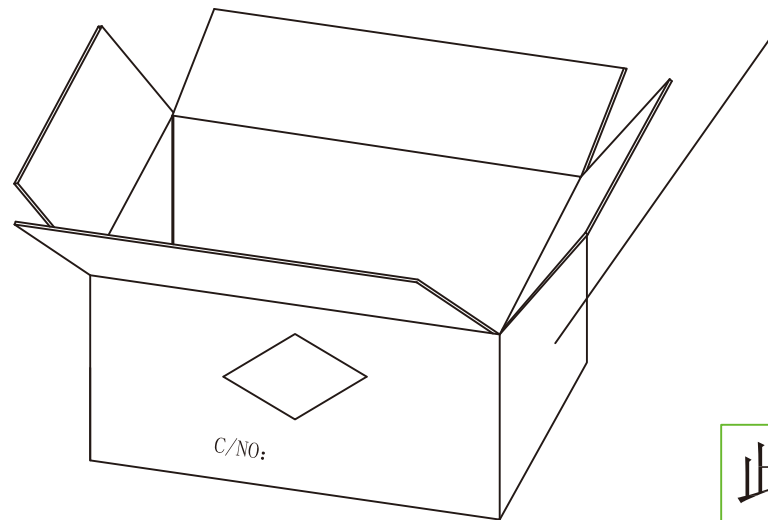

包裝方式說明：

1. 最小包裝PE袋，規格為0.08mm*6inch*8inch包裝，每袋200PCS。
2. 外包裝紙箱為33*27*23CM包裝，共3000PCS。

此包裝仅供参考

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

H-D-2X20-LF
SERIES | LEADFREE
40 WAY
DIP 180°

DESCRIPTION: