

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F



E

D



C

B

A

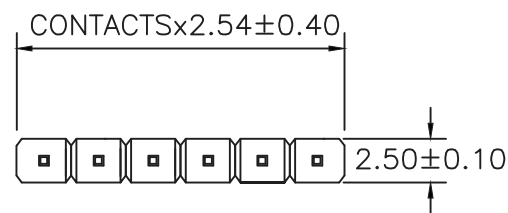

RECOMMENDED P.C.B LAYOUT

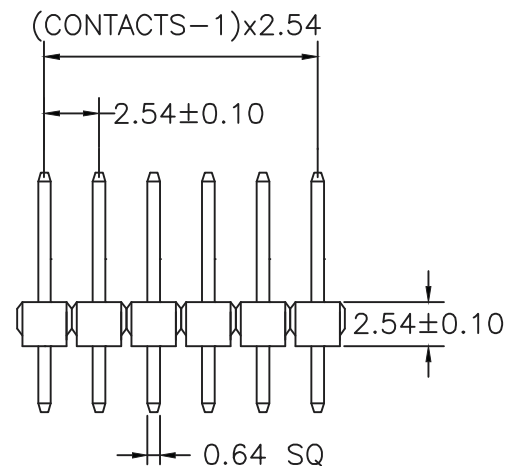

A: 8.54 mm B: 2.70 mm C: 3.30 mm

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55 $^{\circ}$ C TO +105 $^{\circ}$ C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 1000V RM

H-D0852733-1Xxx-LF
LEADFREE
1X02:02WAY
1X50:50WAY
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. H-D0852733-1Xxx

DWG NO. H-D0852733-1Xxx


FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION 

TOLERANCES ARE

X. $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$
ANG $\pm$ 5 $^{\circ}$

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司