

MATERIAL

Insulator : PBT+30%G.F UL94-V0

Contact Pin : Brass

SPECIFICATION




Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

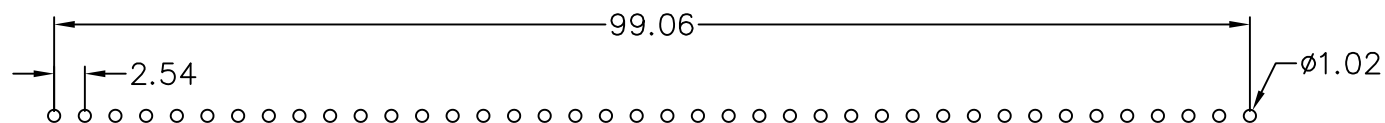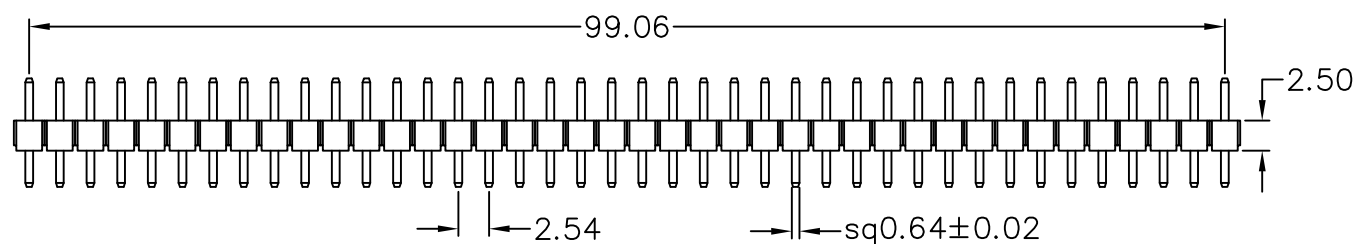

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

H-D090035030-1X40-LF
SERIES
DIP 180°
LONG 9.0mm
CONTACT 3.5mm
DIP 3.0mm
40 WAY
LEADFREE

DESCRIPTION: