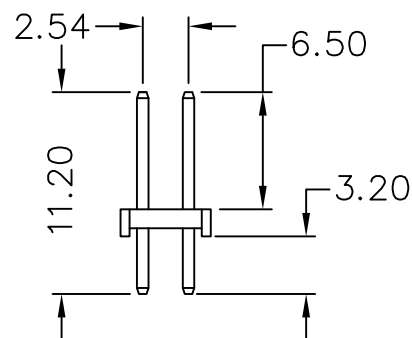
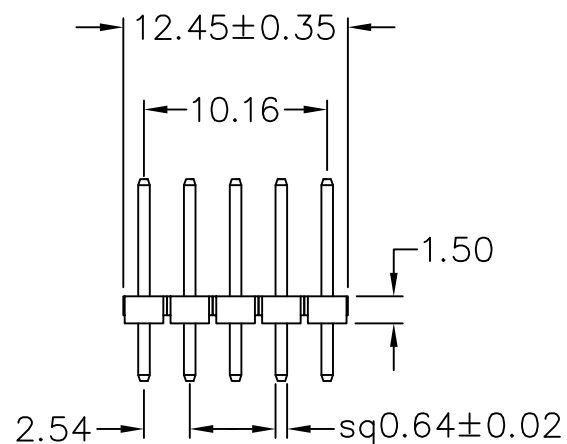
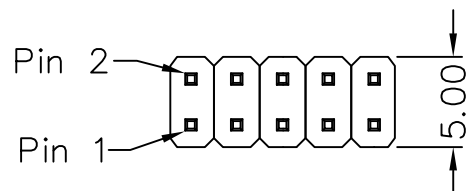


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator : NY6T UL94 V-0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature: -40°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

H-DB065032-2X05-LF
SERIES
10 WAY
LEADFREE
DIP 3.2mm
CONTACT 6.5mm
BASE 1.5mm
DIP 180°

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT TYPE, DUAL ROWS