
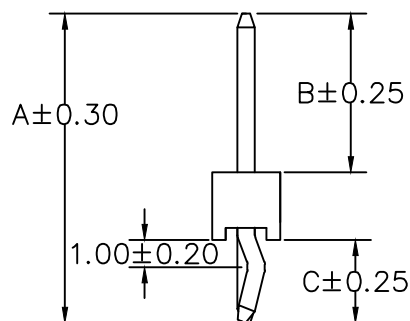


P.C.B LAYOUT

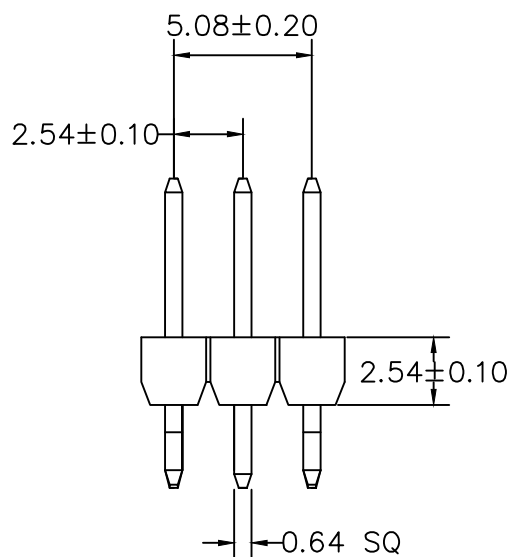

A: 11.38 mm B: 5.84 mm C: 3.00 mm

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO +105 °C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE: AC 1000V RMS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

照片框

ORDER INFORMATION

H-DK-1X03-LF
SERIES | 03 WAY | LEADFREE
KINK
DIP 180°

DESCRIPTION: PIN HEADER 2.54 180°+KINK