




**MATERIAL**

Insulator : 30% Glass fiber PBT  
 Contact Pin : Brass

**SPECIFICATION**

Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute  
 Operation Temperature : -40°C to + 105°C

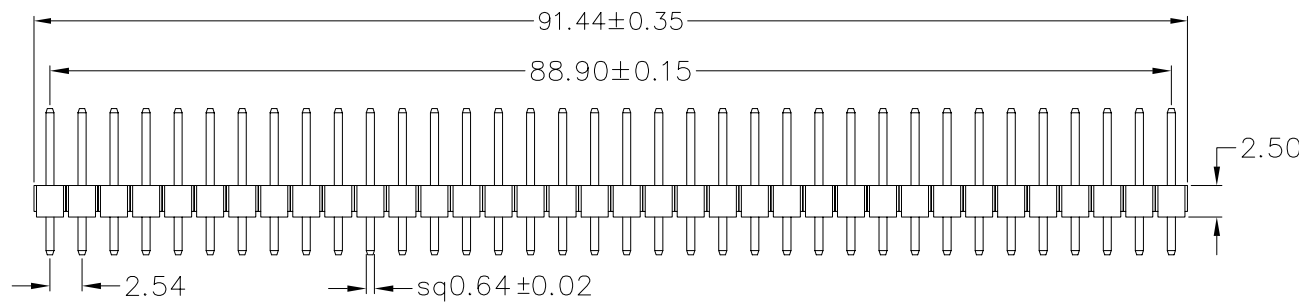

Recommended P.C.B Layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ±  
 ANG ± 3°

PPOJECTION

照片框

**ORDER INFORMATION**

H-DT-1X36-LF  
 SERIES | LEADFREE  
 | 36 WAY  
 | TIN  
 | DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: