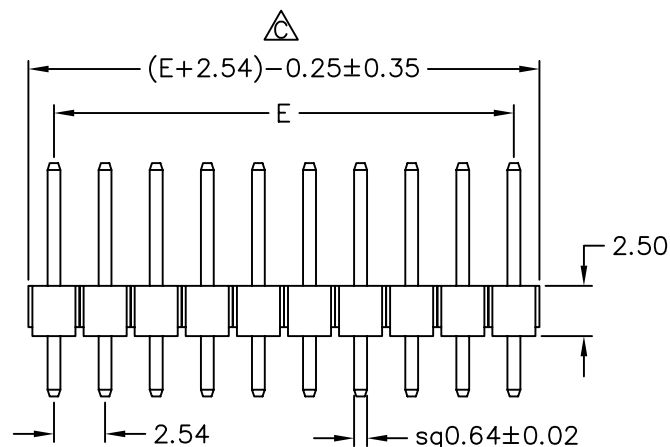
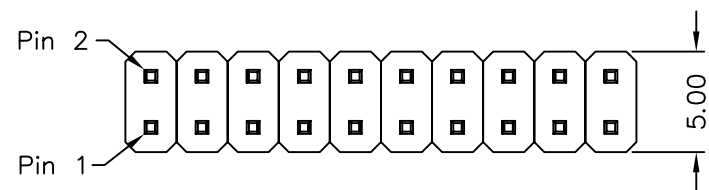


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

POLES	DIM E	POLES	DIM E
2	2.54	21	50.80
3	5.08	22	53.34
4	7.62	23	55.88
5	10.16	24	58.42
6	12.70	25	60.96
7	15.24	26	63.50
8	17.78	27	66.04
9	20.32	28	68.58
10	22.86	29	71.12
11	25.40	30	73.66
12	27.94	31	76.20
13	30.48	32	78.74
14	33.02	33	81.28
15	35.56	34	83.82
16	38.10	35	86.36
17	40.64	36	88.90
18	43.18	37	91.44
19	45.72	38	93.98
20	48.26	39	96.52
		40	99.06

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

H-DT-2Xxx-LF
SERIES
LEADFREE
2X02:04WAY
2X50:100WAY
TIN
DIP 180°

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT TYPE, DUAL ROWS