

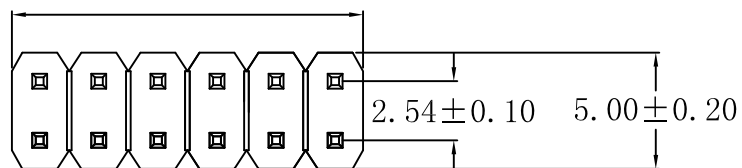



2.54×CONTACTS/2±0.40

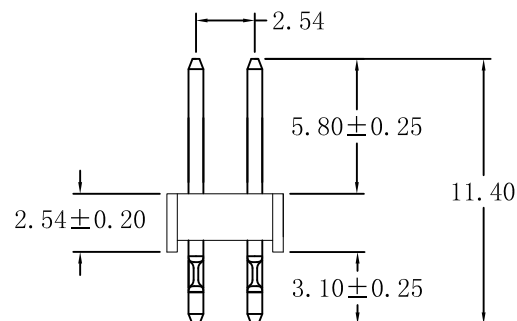

2.54×(CONTACTS/2-1)±0.20

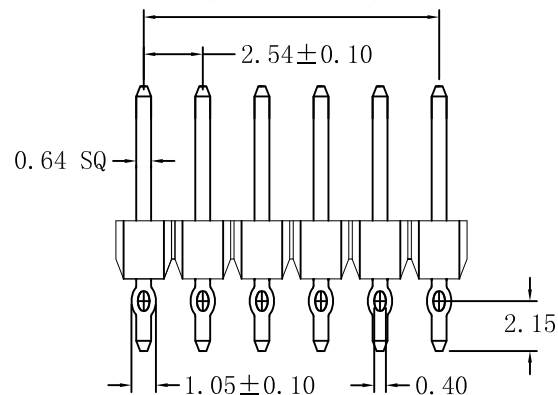

RECOMMENDED P. C. B LAYOUT

CONTACTS	2×21
2×2	2×22
2×3	2×23
2×4	2×24
2×5	2×25
2×6	2×26
2×7	2×27
2×8	2×28
2×9	2×29
2×10	2×30
2×11	2×31
2×12	2×32
2×13	2×33
2×14	2×34
2×15	2×35
2×16	2×36
2×17	2×37
2×18	2×38
2×19	2×39
2×20	2×40

MATERIAL

HOUSING: PBT , UL94V-0

CONTACT: COPPER ALLOYS

PLATED: GOLD FLASH

COLOR : BLACK

SPECIFICATION

CURRENT : 3A

OPERATING TEMPERATURE : -55° C TO +105° C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 1000V RMS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X.±
.X±0.38
.XX±0.25
.XXX±
ANG±5°

PPOJECTION

照片框

ORDER INFORMATION

H-P1145831-2Xxx-LF
SERIES
PRESS FIT
LEADFREE
2X02:04 WAY
2X40:80 WAY
DIP 3.1mm
CONTACT 5.8mm
TOTAL 11.4mm

DESCRIPTION: PIN HEADER 2.54PH×2.54 180° 魚眼頭