

Pin-Header-Press-Fit-Double row-2.54 mm pitch

Technical data :
Insulator material :

High Temperature
Thermoplastic,UL94V-0.

Contact:
Material:

0.635mm x 0.635mm
copper alloy

Plating:

Selective gold plated

Current Rating :

3 Amp

Insulator resistance :

5000 Megohms min.

Dielectric withstanding :





AC 500 V for 1 minute

Temperature Rating:

-40°C to +105°C.

Max. processing Temp:

230°C for 30-60 seconds.
260°C for 10 seconds.

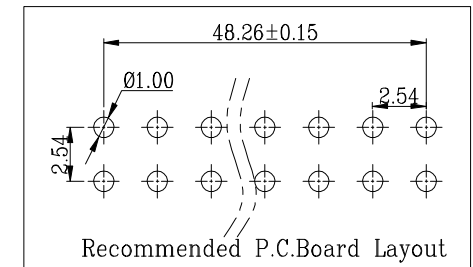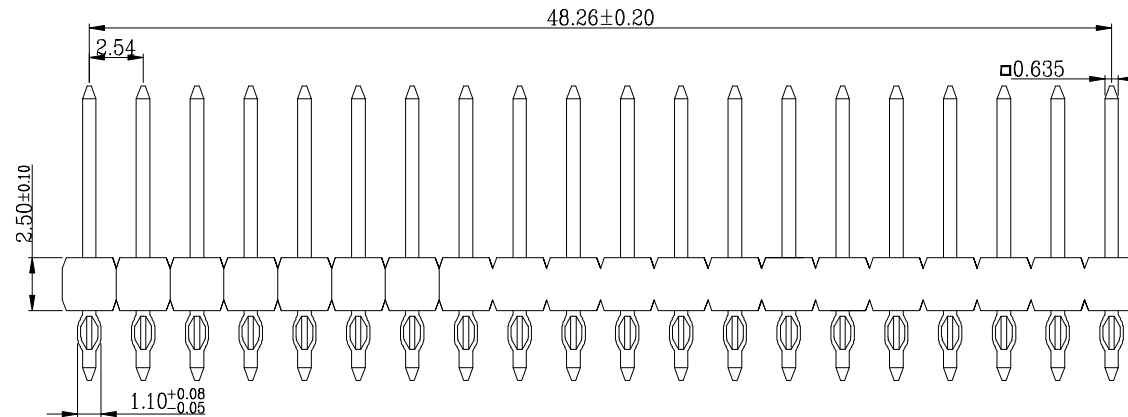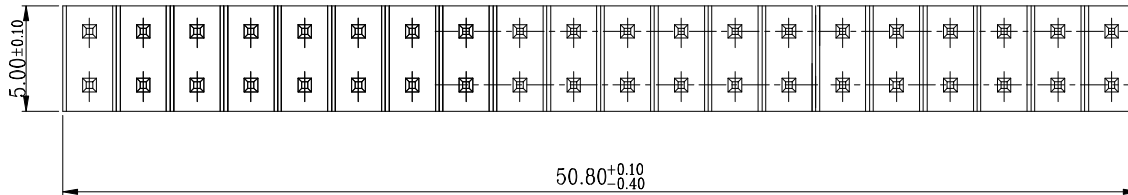

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 1°

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

H-P1398133-2X20-LF

SERIES
LEADFREE
40 WAY
DIP 3.3mm
CONTACT 8.1mm
TOTAL 13.9mm
PRESS FIT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: