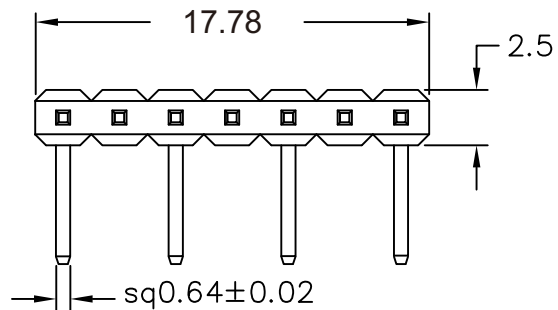


Recommended P.C.B Layout

MATERIAL

Housing: Thermoplasttc UL94V-0

Contact : Copper alloys

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

H-R2537160030EE-1X04-LF
SERIES
DIP 90°
BASE 2.5mm
CONTACT 16.0mm
R/A 3.7mm
EMPTY EVEN PIN
04WAY
LEADFREE

DESCRIPTION: PIN HEADER 2.54*2.54mm
RIGHT ANGLE TYPE, SINGLE ROW OPPOSITE INSULATOR