

MATERIAL

Insulator: NY6T UL94-0

Contact Pin : Brass

SPECIFICATION




Current Rate : 3 AMP

Voltage Rating: 250V AC/DC

Contact resistance: 20m Ohm Max

Withstanding Voltage: 500V AC/Minute

Operating Temperature Range: -40~+105°C

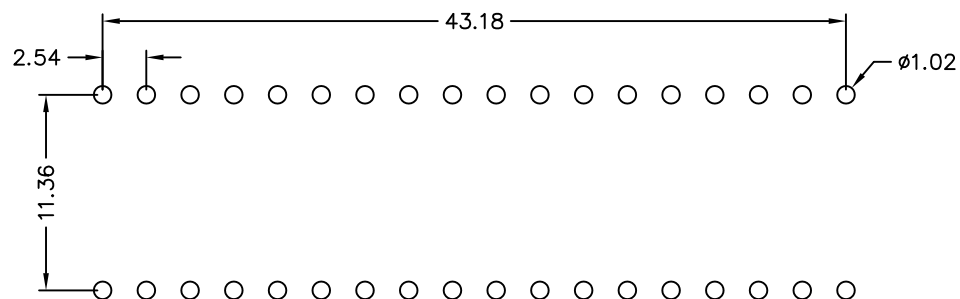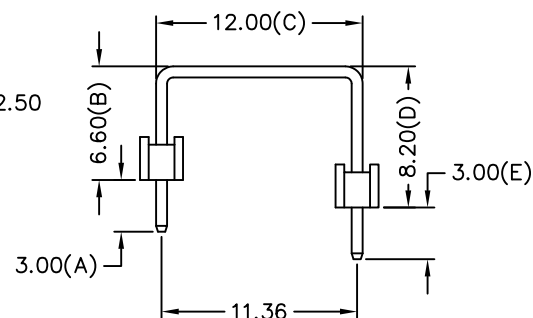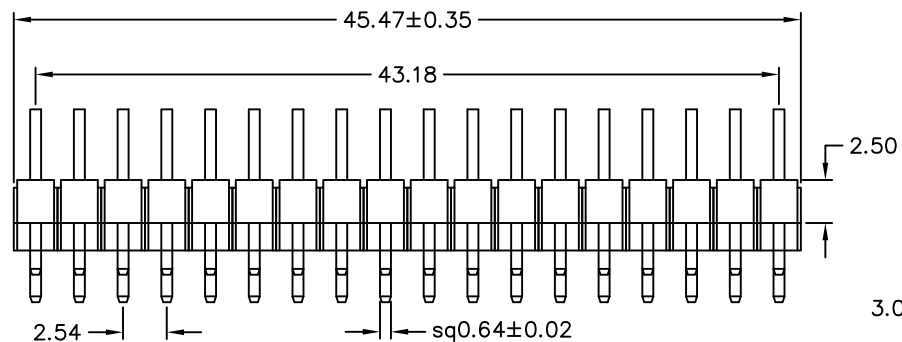

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

H-U045B6682-1X18-LF
SERIES U TYPE HIGH 8.2mm HIGH 6.6mm 18 WAY LEADFREE 045° ROW PITCH 2 BASE

DESCRIPTION: