
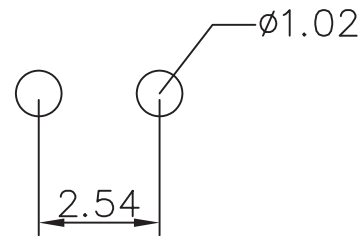
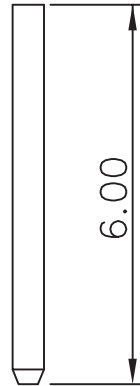


SPECIFICATION

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms min.
Contact Resistance	: 20 Milliohms Max.
Dielectric Withstanding	: AC 500V
Operating Temperature	: -40°C~+105°C
Contact Material	: Brass
Contact Plated	: Full Gold, Full Tin, Selective Plated

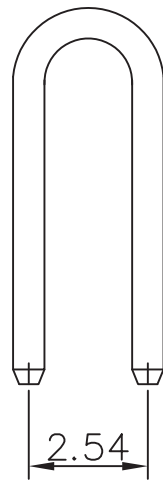

P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

H-UXB-1X02-LF
SERIES | 02 WAY | LEADFREE
NON BASE
U TYPE

DESCRIPTION: 2.54mm Pin Header Single Row 02 to 40 Contacts U Style Type Profile:2.54mm