


Recommended P.C.B Layout

**MATERIAL**

Contact Pin : Brass

**SPECIFICATION**

Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute  
 Operation Temperature : -40°C to + 105°C

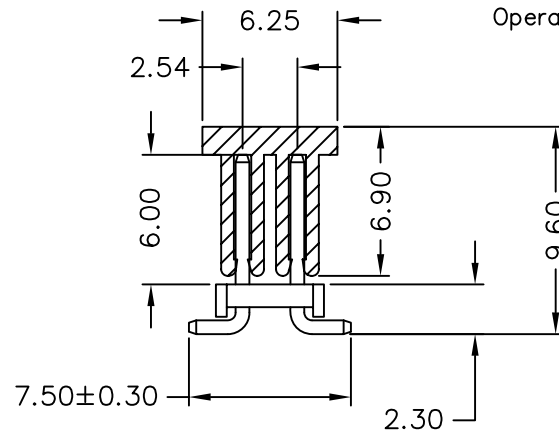

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG±

PJECTION

照片框

**ORDER INFORMATION**

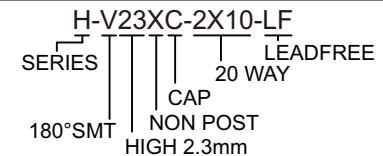

DESCRIPTION: PIN HEADER 2.54\*2.54mm SMT S/T TYPE, DUAL ROWS CAP