

Dim.C	NOTE
5.00mm	02PIN
6.50mm	03~10PIN

Specifications

Current Rating:3.0Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:600VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C



Materials

Contact Material:Brass


Insulator Material:High Temperature

Thermoplastic, UL 94V-0 Nylon 6T

or the equivalent material

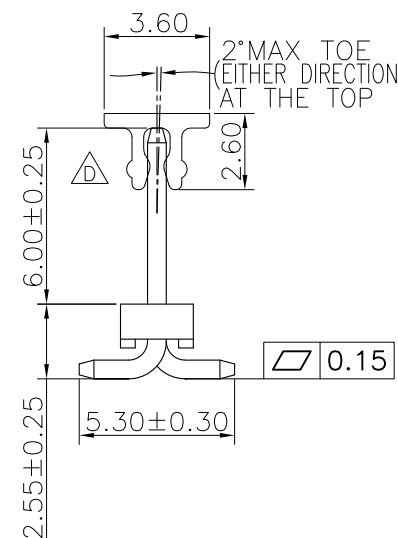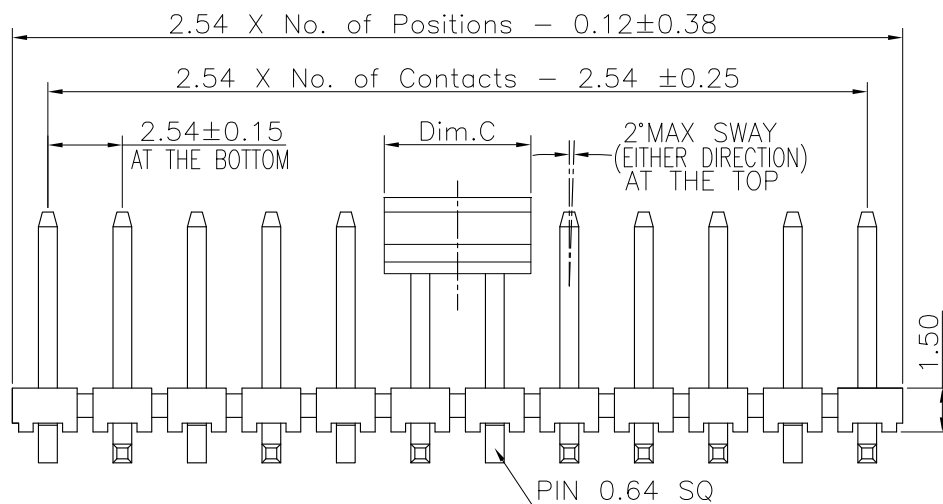

Recommended P.C.Board
Layout
(Tolerance:±0.05)

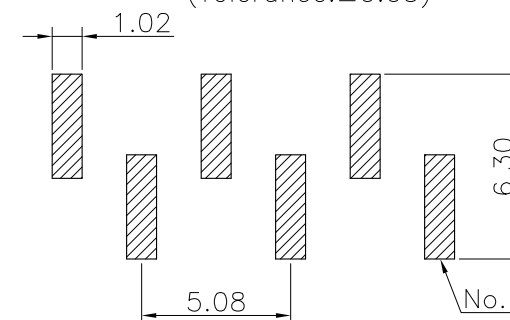

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

H-V25XC-1XxxR-LF
SERIES
180°SMT
HIGH 2.55mm
NON POST
CAP
LEADFREE
R:R TYPE FOOT POSITION
1X02:02WAY
1X10:10WAY

DESCRIPTION: