

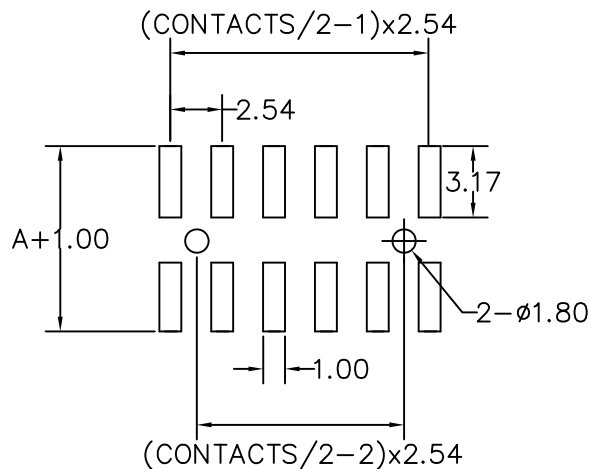
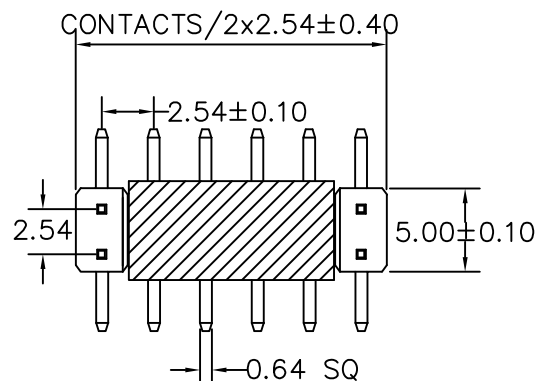




RECOMMENDED P.C.B LAYOUT

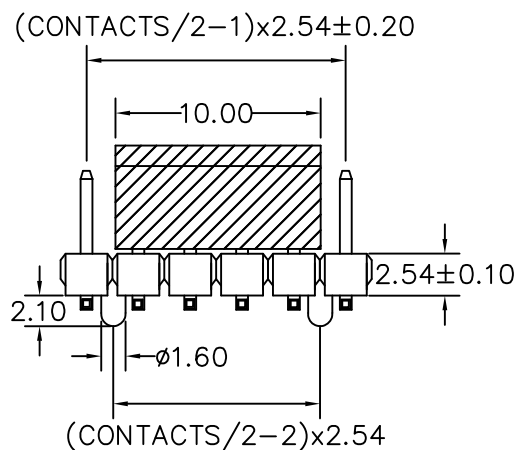

A: 7.50 mm B: 3.05 mm C: 3.30 mm

CONTACTS	
2X3	2X22
2X4	2X23
2X5	2X24
2X6	2X25
2X7	2X26
2X8	2X27
2X9	2X28
2X10	2X29
2X11	2X30
2X12	2X31
2X13	2X32
2X14	2X33
2X15	2X34
2X16	2X35
2X17	2X36
2X18	2X37
2X19	2X38
2X20	2X39
2X21	2X40

MATERIAL

HOUSING : NY6T,UL94V-0
CONTACT : COPPER ALLOYS
PLATED : GOLD-FLASH
COLOR : BLACK

SPECIFICATION

CURRENT: 3A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAGE : AC 1000V RMS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

H-V33P30C-2Xxx-LF
SERIES
180°SMT
HIGH 3.3mm
POST
LEADFREE
2X03:06 WAY
2X40:80 WAY
CAP
CONTACT 3.05mm

DESCRIPTION: PIN HEADER 2.54 SMT+POST+CAP