

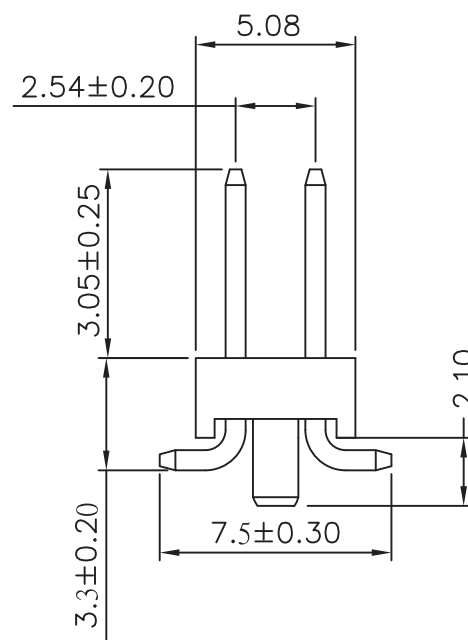
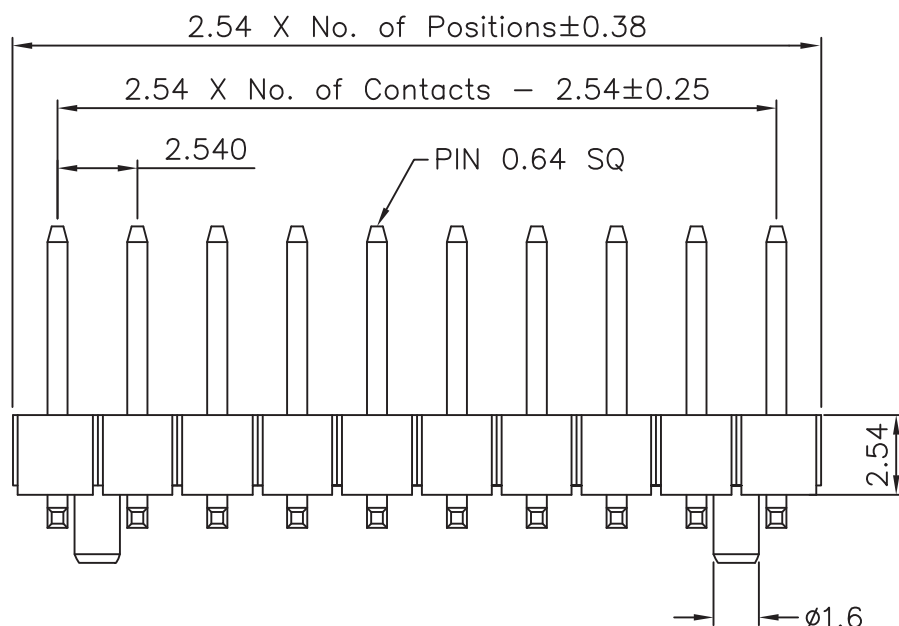


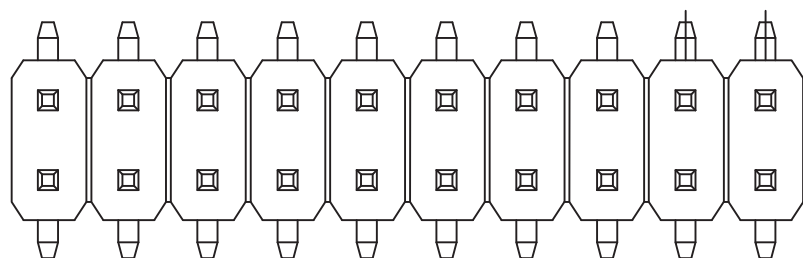

Recommended P.C.Board
Layout

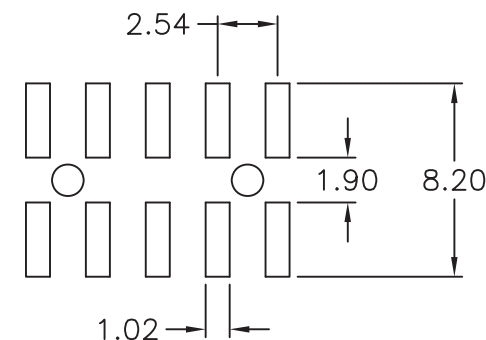

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600VAC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper alloy

Insulator Material: Polyester, UL94V-0
NYLON-6T

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

H-V33P30S15-2Xxx-LF
SERIES POST LEADFREE
180°SMT HIGH 3.3mm CONTACT 3.05mm
2X03:06 WAY
2X40:80 WAY
SEMI GOLD 15u"

DESCRIPTION: 2.54 PIN HEADER DUAL ROW SMT TYPE BASE 2.54