

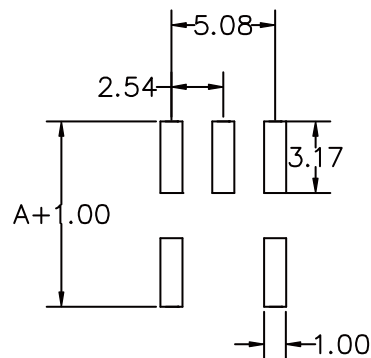
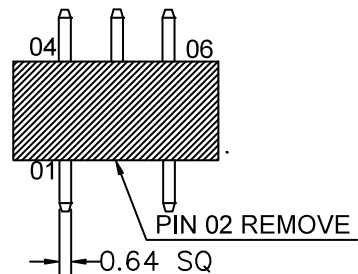




RECOMMENDED P.C.B LAYOUT

MATERIAL
HOUSING : NYLON-6T,UL94V-0
PLATED : GOLD-FLASH
COLOR : BLACK

SPECIFICATION
CURRENT: 3A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAGE : AC 1000V RMS

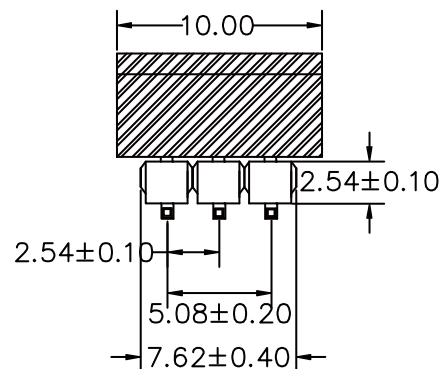

A: 7.50 mm B: 3.00 mm C: 3.30 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

照片框

ORDER INFORMATION

H-V33X30C-2X03E2-LF
 SERIES | 180°SMT | HIGH 3.3mm | CAP | CONTACT 3.0mm | NON POST | 06 WAY | LEADFREE | EMPTY 2 PIN

DESCRIPTION: PIN HEADER 2.54 SMT+CAP H:2.54 2*3(N2)PIN