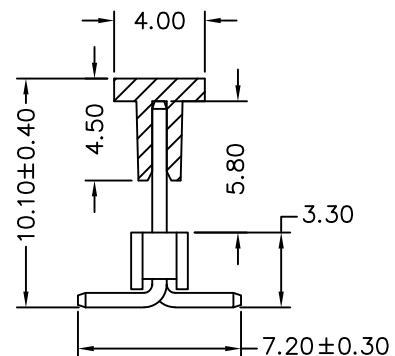
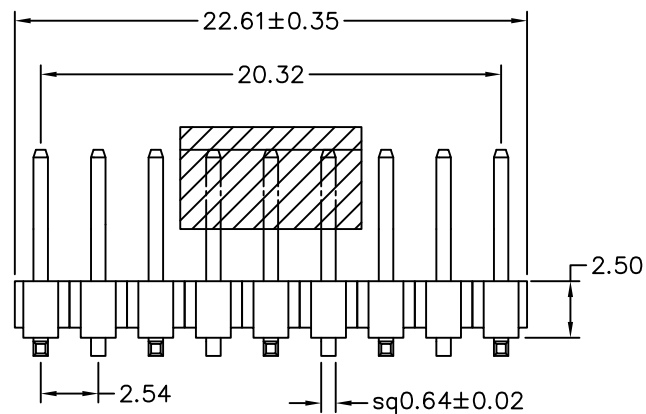
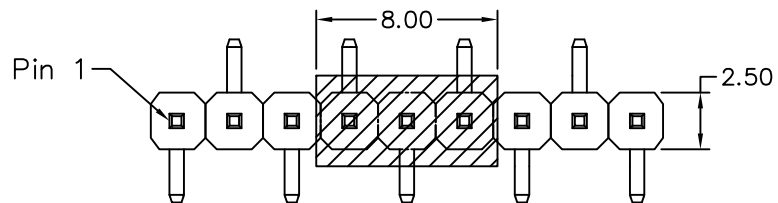


B-TYPE Recommended P.C.B Layout

MATERIAL

Insulator: NY6T UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

照片框

ORDER INFORMATION

H-V33X58C-1X09L-LF
SERIES
180°SMT
HIGH 3.3mm
CAP
CONTACT 5.8mm
NON POST
09 WAY
LEADFREE
L TYPE FOOT POSITION

DESCRIPTION: PIN HEADER 2.54*2.54mm SMT S/T TYPE, SINGLE ROW CAP