
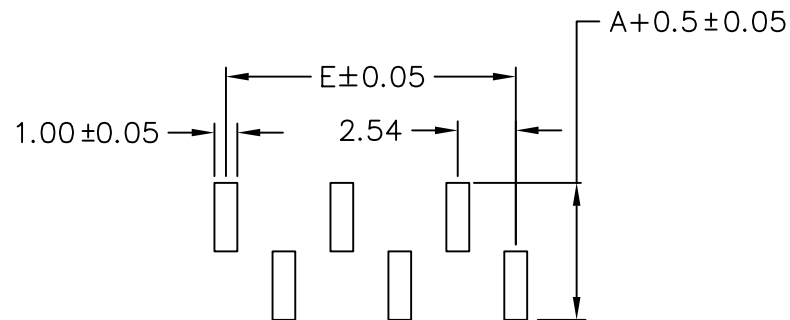

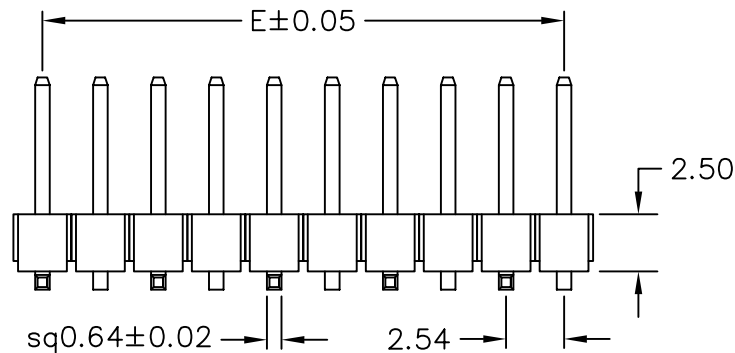


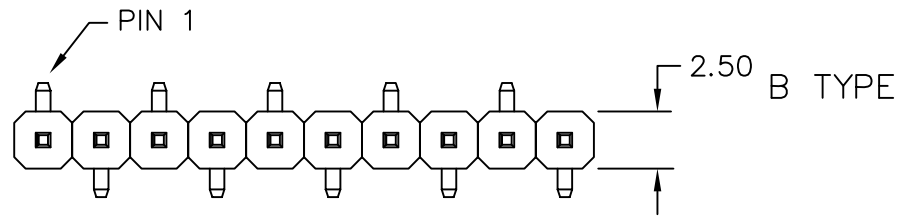

Recommended P.C.B Layout

MATERIAL

Insulator : NYLON 6T

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

POLES	DIM E	POLES	DIM E
		18	43.18
2	2.54	19	45.72
3	5.08	20	48.26
4	7.62	21	50.80
5	10.16	22	53.34
6	12.70	23	55.88
7	15.24	24	58.42
8	17.78	25	60.96
9	20.32	26	63.50
10	22.86	27	66.04
11	25.40	28	68.58
12	27.94	29	71.12
13	30.48	30	73.66
14	33.02	31	76.20
15	35.56	32	78.74
16	38.10	33	81.28
17	40.64		

CODE	DIM A	DIM B	DIM C
H-V33XS10-1XxxR	5.00	6.00	3.30

contact o
If you need other dimensions,
please fill out Dim A/B/C or
ur sales representatives.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

H-V33XS10-1XxxR-LF
SERIES
180°SMT
HIGH 3.3mm
LEADFREE
R:R TYPE FOOT POSITION
1X02:02WAY
1X33:33WAY
SEMI GOLD 10u"
NON POST

DESCRIPTION: