
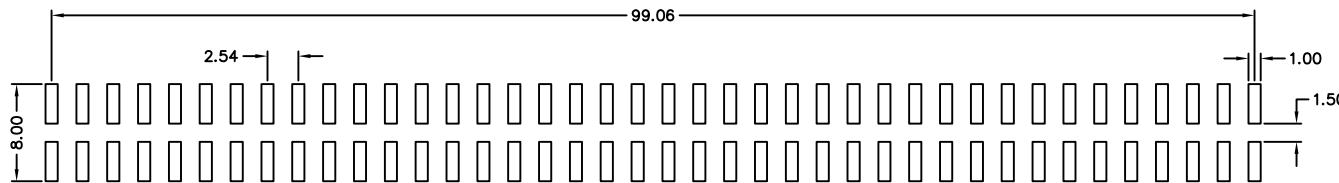



MATERIAL

Contact Pin : Brass
 Insulator : NY6T UL94-V0

SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

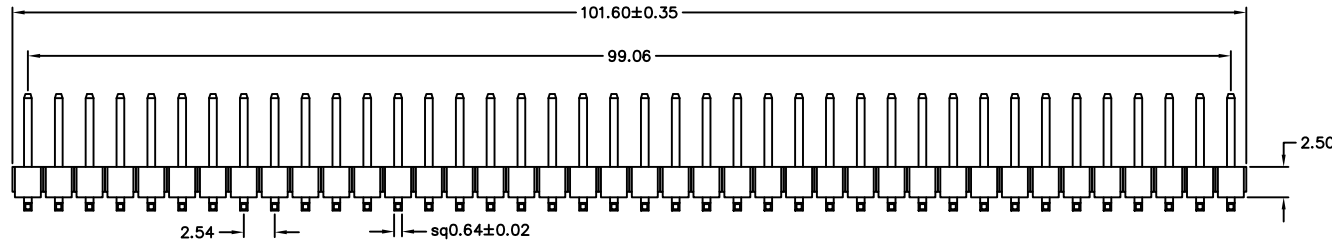

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

PJECTION

照片框

ORDER INFORMATION

H-V36X-2X40-LF
 SERIES | | | LEADFREE
 | | | 80 WAY
 | | | NON POST
 | | | HIGH 3.6mm
 | | | 180°SMT

DESCRIPTION: