
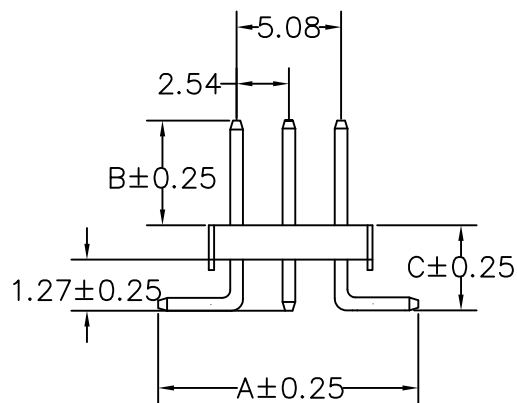


RECOMMENDED P.C.B LAYOUT

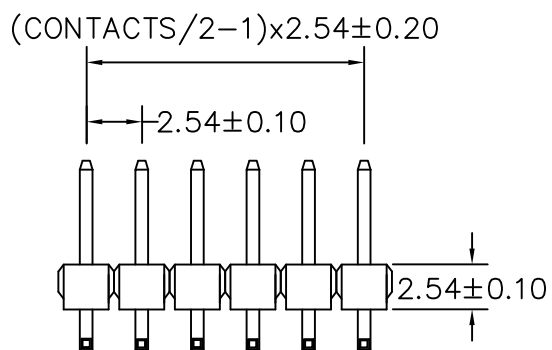

A: 10.00 mm B: 5.84 mm C: 3.81 mm

CONTACTS	3X21
3X2	3X22
3X3	3X23
3X4	3X24
3X5	3X25
3X6	3X26
3X7	3X27
3X8	3X28
3X9	3X29
3X10	3X30
3X11	3X31
3X12	3X32
3X13	3X33
3X14	3X34
3X15	3X35
3X16	3X36
3X17	3X37
3X18	3X38
3X19	3X39
3X20	3X40

MATERIAL

HOUSING : NY6T,UL94V-0
 CONTACT : COPPER ALLOYS
 PLATED : GOLD FLASH
 COLOR : BLACK

SPECIFICATION

CURRENT: 3A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE : AC 1000V RMS

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

PJECTION

照片框

ORDER INFORMATION

H-V38X58-3Xxx-LF
 SERIES | | | | LEADFREE
 180°SMT | | | | 3X02:06WAY
 | | | | 3X40:120WAY
 | | | | CONTACT 5.84mm
 | | | | NON POST
 | | | | HIGH 3.81mm

DESCRIPTION: PIN HEADER 2.54 3# SMT+DIP