


Current Rating and Voltage: 3 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Standard: Brass
 Insulator Material: High Temperature
 Plastic,UL 94V-0
 Finish: Standard: Gold Flash all over

Recommended P.C. Board
 SMD Layout

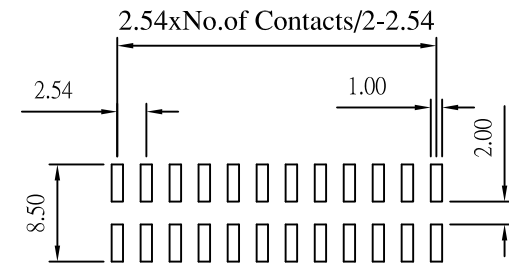

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

照片框

ORDER INFORMATION

H-V38X58C-2Xxx-LF
 SERIES | LEADFREE
 2X02:04 WAY
 2X40:80 WAY
 180°SMT | CAP CONTACT 5.84mm
 HIGH 3.81mm | NON POST

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com