

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 600VAC





Contact Resistance: 20m Ω Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper alloy

Insulator Material: Polyester, UL94V-0
NYLON-6T

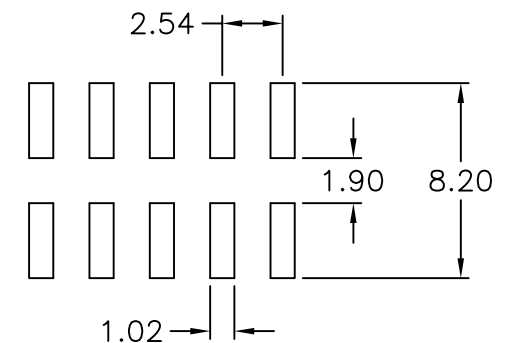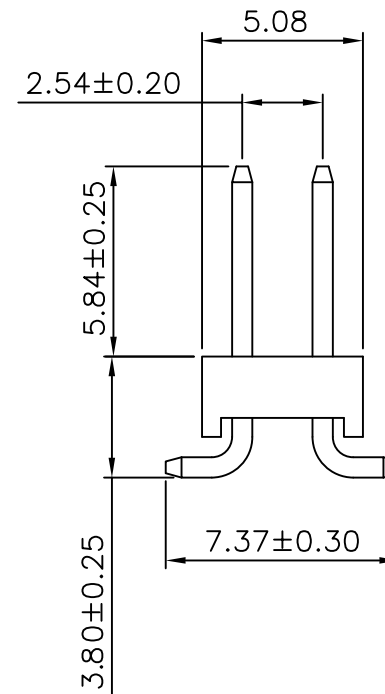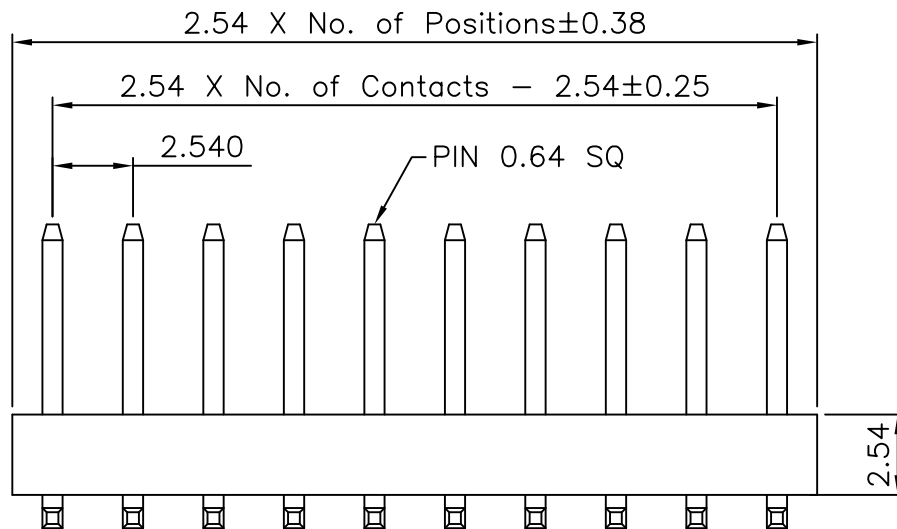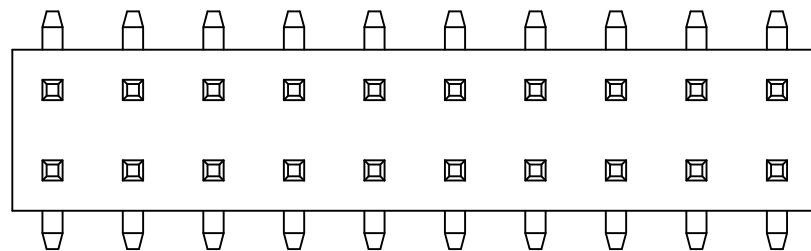

Recommended P.C.Board
Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.13
ANG $\pm$

照片框

ORDER INFORMATION

H-V38X58T-2Xxx-LF
SERIES
180°SMT
HIGH 3.8mm
TIN
CONTACT 5.8mm
NON POST
LEADFREE
2X02:04WAY
2X40:80WAY

DESCRIPTION: 2.54 PIN HEADER DUAL ROW SMT TYPE BASE 2.54