

MATERIAL

Contact Pin : Brass

SPECIFICATION




Current Rate : 3 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

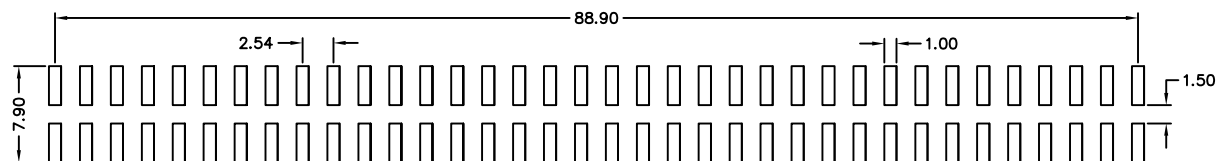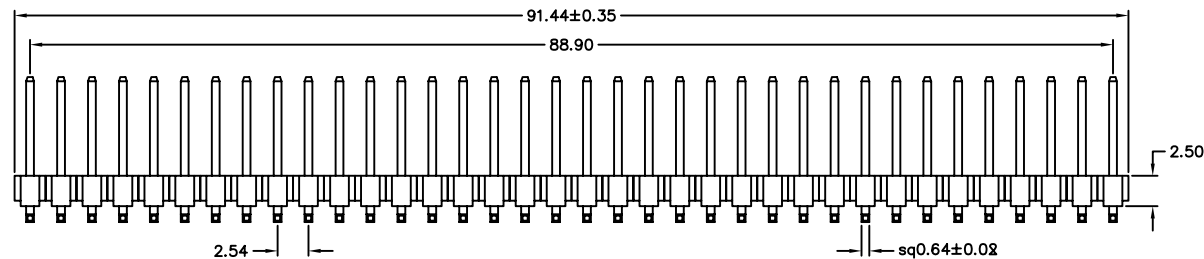

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

H-V38X81-2X36-LF
SERIES | LEADFREE
72 WAY
CONTACT 8.1mm
180°SMT | NON POST
HIGH 3.8mm

DESCRIPTION: PIN HEADER 2.54*2.54mm SMT S/T H=2.5mm 2*36P