

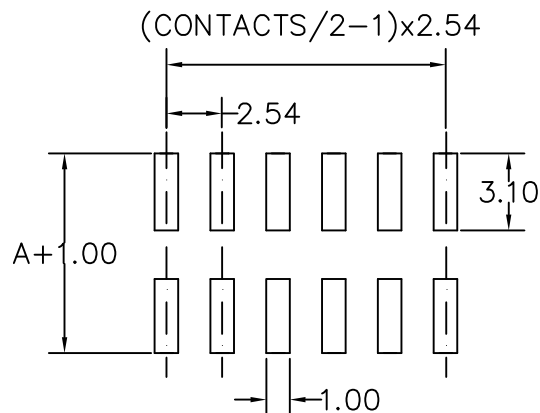
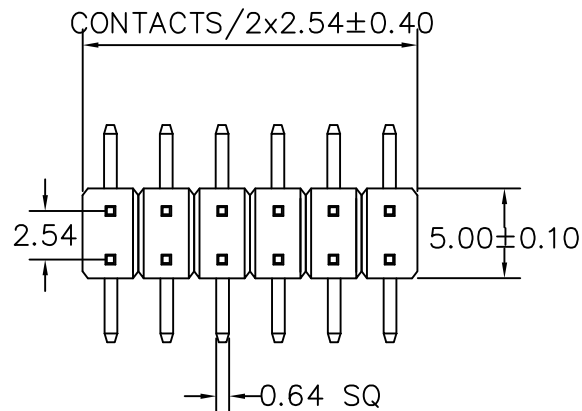


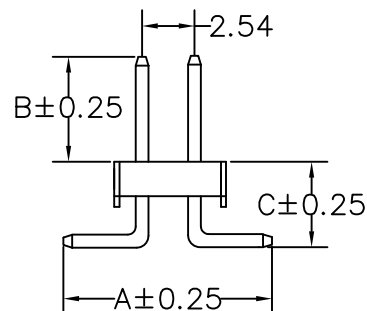

### RECOMMENDED P.C.B LAYOUT

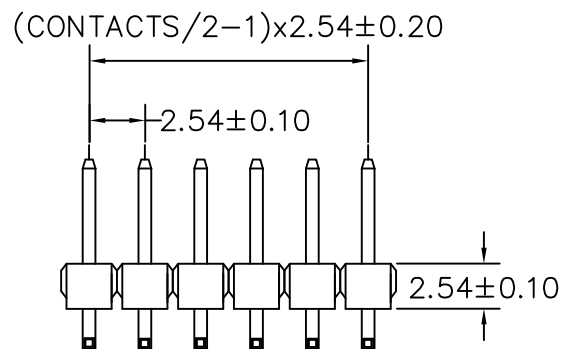

A: 7.50 mm B: 8.08 mm C: 4.05 mm

| CONTACTS | 2X21 |
|----------|------|
| 2X2      | 2X22 |
| 2X3      | 2X23 |
| 2X4      | 2X24 |
| 2X5      | 2X25 |
| 2X6      | 2X26 |
| 2X7      | 2X27 |
| 2X8      | 2X28 |
| 2X9      | 2X29 |
| 2X10     | 2X30 |
| 2X11     | 2X31 |
| 2X12     | 2X32 |
| 2X13     | 2X33 |
| 2X14     | 2X34 |
| 2X15     | 2X35 |
| 2X16     | 2X36 |
| 2X17     | 2X37 |
| 2X18     | 2X38 |
| 2X19     | 2X39 |
| 2X20     | 2X40 |

### MATERIAL

HOUSING : NYLON 6T,UL94V-0

CONTACT : COPPER ALLOYS

PLATED : TIN-PLATED

COLOR : BLACK

### SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 1000V RMS

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ±  
ANG ± 5°

照片框

### ORDER INFORMATION

H-V40X80T-2Xxx-LF  
SERIES  
180°SMT  
HIGH 4.05mm  
TIN  
CONTACT 8.08mm  
NON POST  
LEADFREE  
2X02:04WAY  
2X40:80WAY

DESCRIPTION: PIN HEADER 2.54 SMT H:2.54