


Recommended P.C.B Layout

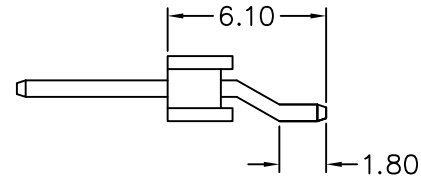

**MATERIAL**

Insulator : NY6T UL94-V0  
Contact Pin : Brass

**SPECIFICATION**

Current Rate : 1 AMP  
Insulation Resistance : 5000MΩMin. at DC 500V  
Contact Resistance : 15mΩMax.  
Dielectric Voltage : AC 500V for one minute  
Operating Temperature: -40°C to +105°C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ± 3°

照片框

**ORDER INFORMATION**

H-WX-1X07-LF  
SERIES | LEADFREE  
| 07 WAY  
| NON POST  
| 90°SMT

DESCRIPTION: PIN HEADER 2.54\*2.54mm SINGLE ROW, HORIZONTAL PIN