
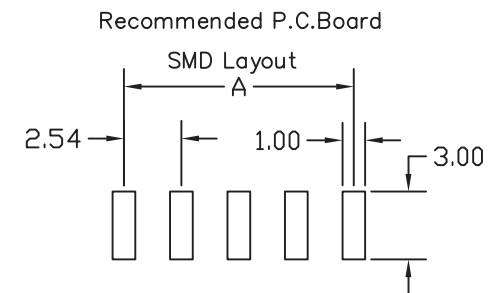
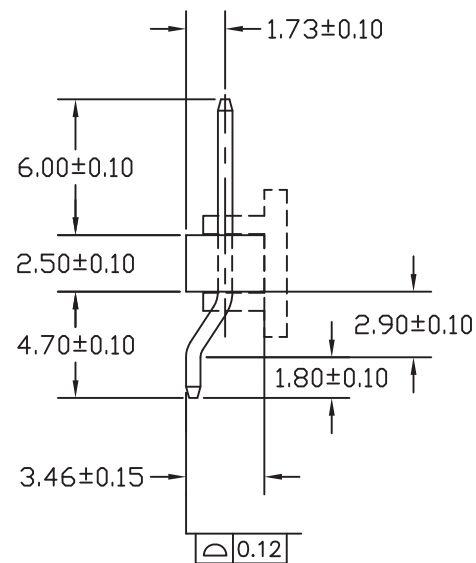
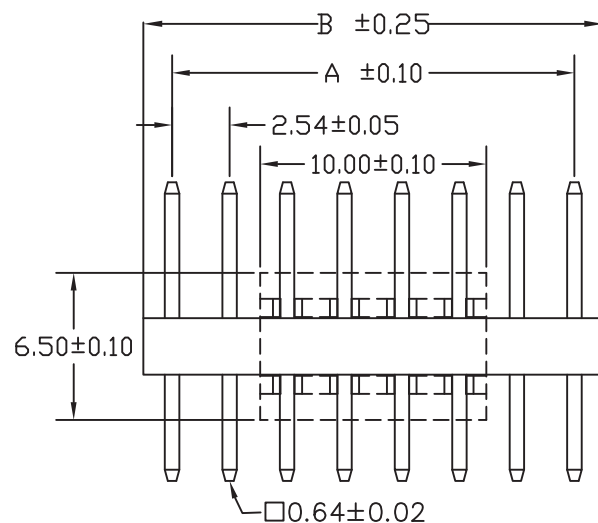


| No. of<br>Contacts | DIMENSIONS |        |
|--------------------|------------|--------|
|                    | A          | B      |
| 3                  | 5.08       | 7.62   |
| 4                  | 7.62       | 10.16  |
| 5                  | 10.16      | 12.70  |
| 6                  | 12.70      | 15.24  |
| 7                  | 15.24      | 17.78  |
| 8                  | 17.78      | 20.32  |
| 9                  | 20.32      | 22.86  |
| 10                 | 22.86      | 25.40  |
| 11                 | 25.40      | 27.94  |
| 12                 | 27.94      | 30.48  |
| 13                 | 30.48      | 33.02  |
| 14                 | 33.02      | 35.56  |
| 15                 | 35.56      | 38.10  |
| 16                 | 38.10      | 40.64  |
| 17                 | 40.64      | 43.18  |
| 18                 | 43.18      | 45.72  |
| 19                 | 45.72      | 48.26  |
| 20                 | 48.26      | 50.80  |
| 21                 | 50.80      | 53.34  |
| 22                 | 53.34      | 55.88  |
| 23                 | 55.88      | 58.42  |
| 24                 | 58.42      | 60.96  |
| 25                 | 60.96      | 63.50  |
| 26                 | 63.50      | 66.04  |
| 27                 | 66.04      | 68.58  |
| 28                 | 68.58      | 71.12  |
| 29                 | 71.12      | 73.66  |
| 30                 | 73.66      | 76.20  |
| 31                 | 76.20      | 78.74  |
| 32                 | 78.74      | 81.28  |
| 33                 | 81.28      | 83.82  |
| 34                 | 83.82      | 86.36  |
| 35                 | 86.36      | 88.90  |
| 36                 | 88.90      | 91.44  |
| 37                 | 91.44      | 93.98  |
| 38                 | 93.98      | 96.52  |
| 39                 | 96.52      | 99.06  |
| 40                 | 99.06      | 101.60 |

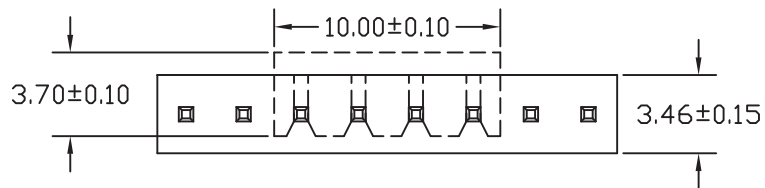

## SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms Min.  
 Contact resistance: 20 m ohm Max.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40°~+105°C  
 Max Processing Temp: 230° for 30 seconds  
 Contact Material: Copper alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0

Finish: Tin, Gold or Duplex plated

◎ Standard: Duplex plated

◎ Note:

Duplex plating: gold plated on contact area,  
Tin on solder area

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

照片框

## ORDER INFORMATION

H-WXCR-1Xxx-LF  
 SERIES | LEADFREE  
 1X03:03WAY  
 1X40:40WAY  
 REEL  
 CAP  
 NON POST  
 90°SMT

DESCRIPTION:


# 包裝作業規範

料號 H-WXCR-1Xxx


|       |                         |
|-------|-------------------------|
| 包裝盤料號 | PALSTIC REEL<br>W: 24MM |
| 紙箱料號  | C018                    |

## 包裝作業圖示及說明 (PACKING OPERATION DIAGRAM & INSTRUCTION)


- 一、  
1) 將成品放入口袋內，成品排列如圖示。

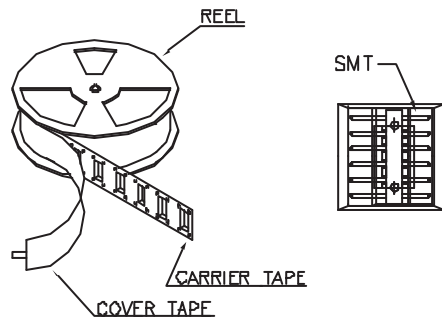


- 二、  
1) CARRIER TAPE 最前頭需預留至少160mm 長之空口袋。  
2) COVER TAPE 較 CARRIER TAPE 長，且用 TAPE 固定。  
3) REEL 邊緣須用 TAPE 固定。  
4) REEL 上貼客戶標籤，或廠內標籤。



- 三、  
1) 如圖示包裝 REEL 裝入防水袋內，上下墊保麗龍，每捲不得斷帶亦不得連續，未滿捲之 REEL 則裝入零數箱；以膠帶封箱。  
2) 一盤 REEL 可放置 500 PCS 的成品。  
3) 一只紙箱裝 7 盤 REEL，共有成品 16000 PCS。

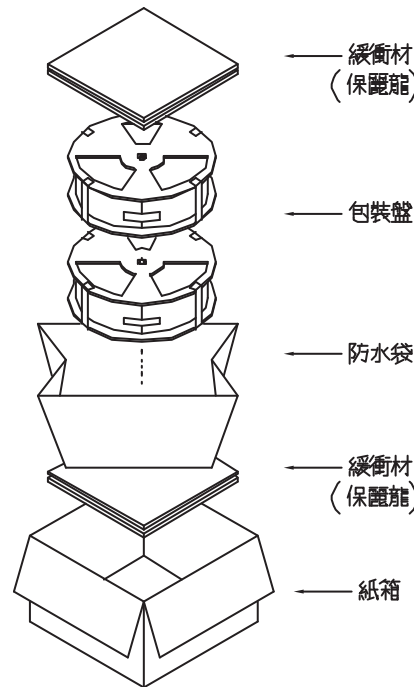

- 四、  
1) 將標籤貼於紙箱側，麥右上虛線框內。

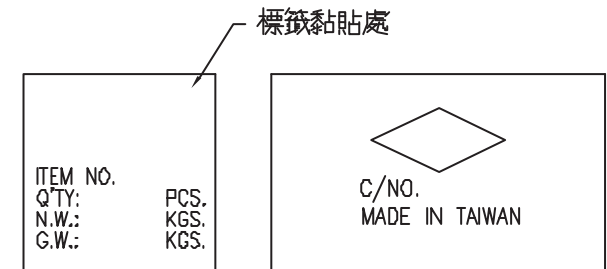

## 備註 (REMARK)

1. 若有未裝滿之零數箱，必須以緩衝材塞滿。  
2. 包裝中 CARRIER 若斷帶該捲得以零數捲包裝。  
3. 包裝材料料號附註：  
防水袋：080-0012-038  
保麗龍：080-0030-834

CARRIER TAPE : CA370-A  
COVER TAPE : CTA002 W: 21.3MM  
PLASTIC REEL : PR002 W: 24MM

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X, ±  
.XX, ±  
.XXX, ±  
ANG, ±

照片框

ORDER INFORMATION

H-WXCR-1Xxx-LF  
SERIES | LEADFREE  
1X03:03WAY  
1X40:40WAY  
90°SMT | REEL  
CAP  
NON POST

DESCRIPTION: