
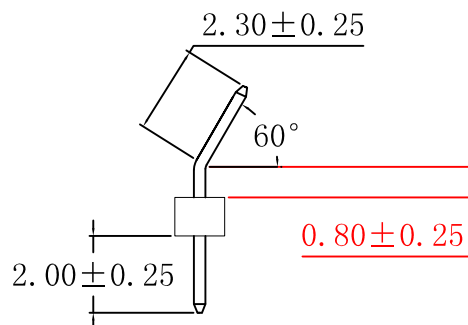


RECOMMENDED P. C. B LAYOUT

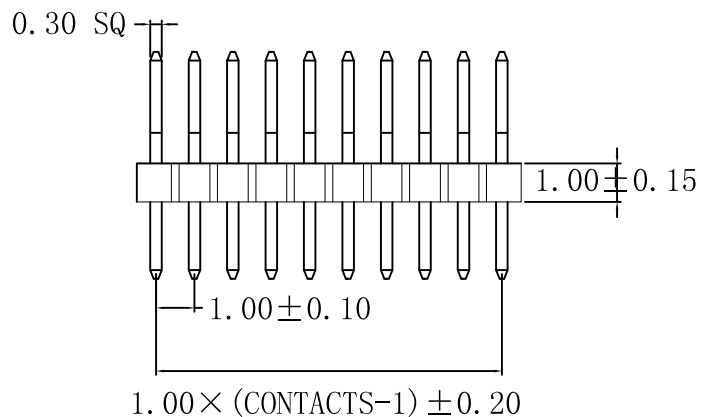

MATERIAL

HOUSING : NYLON 6T,UL94V-0

CONTACT : COPPER ALLOYS

PLATED : GOLD-FLASH

COLOR : BLACK

SPECIFICATION

CURRENT : 1A

OPERATING TEMPERATURE : -55°C TO $+105^\circ\text{C}$

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : 500V AC MIN

CONTACTS	
1X2	1X26
1X3	1X27
1X4	1X28
1X5	1X29
1X6	1X30
1X7	1X31
1X8	1X32
1X9	1X33
1X10	1X34
1X11	1X35
1X12	1X36
1X13	1X37
1X14	1X38
1X15	1X39
1X16	1X40
1X17	1X41
1X18	1X42
1X19	1X43
1X20	1X44
1X21	1X45
1X22	1X46
1X23	1X47
1X24	1X48
1X25	1X49
	1X50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$
ANG $\pm$ 5°

照片框

ORDER INFORMATION

H10-A10082320-1Xxx-LF

SERIES

SLANT

BASE 1.0mm

0.8+2.3mm

DIP 2.0mm

LEADFREE

1X02:02WAY

1X50:50WAY

DESCRIPTION: PIN HEADER 1.0 H:1.0 60度 半排