
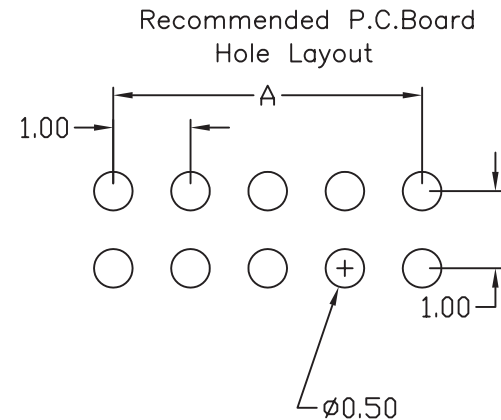
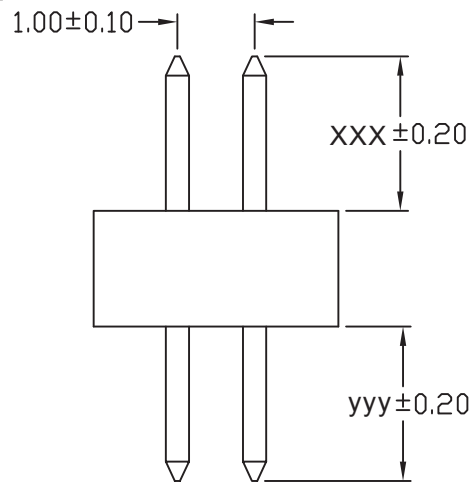
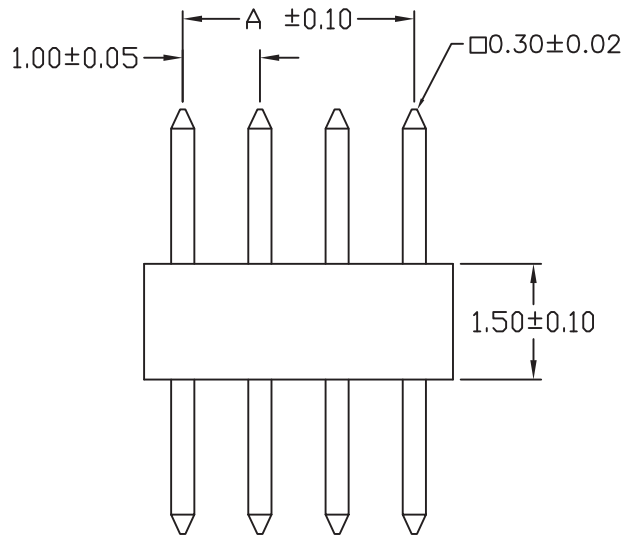


No. of Contacts	DIMENSIONS	
	A	B
10	4.00	5.00
12	5.00	6.00
14	6.00	7.00
16	7.00	8.00
18	8.00	9.00
20	9.00	10.00
22	10.00	11.00
24	11.00	12.00
26	12.00	13.00
28	13.00	14.00
30	14.00	15.00
32	15.00	16.00
34	16.00	17.00
36	17.00	18.00
38	18.00	19.00
40	19.00	20.00
42	20.00	21.00
44	21.00	22.00
46	22.00	23.00
48	23.00	24.00
50	24.00	25.00
52	25.00	26.00
54	26.00	27.00
56	27.00	28.00
58	28.00	29.00
60	29.00	30.00
62	30.00	31.00
64	31.00	32.00
66	32.00	33.00
68	33.00	34.00
70	34.00	35.00
72	35.00	36.00
74	36.00	37.00
76	37.00	38.00
78	38.00	39.00
80	39.00	40.00
82	40.00	41.00
84	41.00	42.00
86	42.00	43.00
88	43.00	44.00
90	44.00	45.00
92	45.00	46.00
94	46.00	47.00
96	47.00	48.00
98	48.00	49.00
100	49.00	50.00

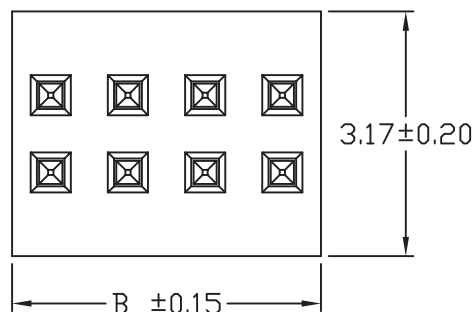

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: Polyester,UL 94V-0
 ©Standard:L.C.P

Finish: Tin, Gold plated

©Standard: Gold flash all over

△ Retention Force : 200 g Min Per Pin.
 Insertion Force : 150 g Min Per Pin.
 Separator Force : 25 g Min Per Pin.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

H10-D15xxxxyy-2Xxx-LF
 SERIES CONTACT BASE 1.5mm
 DIP 180°
 025:2.5mm
 016:1.6mm
 LEADFREE
 2X02:04WAY
 2X50:100WAY

DESCRIPTION: