

Recommended P.C.B Layout

**MATERIAL**

Contact Pin : Brass

**SPECIFICATION**

Current Rate : 1 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute  
 Operation Temperature : -40°C to + 105°C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG ±


SIZE A4

P PROJECTION

照片框

**ORDER INFORMATION**

H10-R15101820-2X20-LF

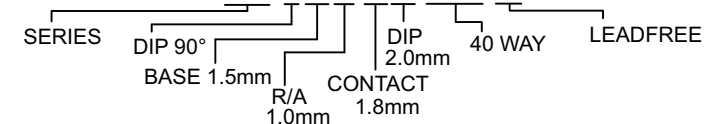

DESCRIPTION: PIN HEADER 1.0\*1.0mm  
 RIGHT ANGLE TYPE, DUAL ROWS HEIGHT=1.5mm

煜倫股份有限公司

www.morethanall.com