

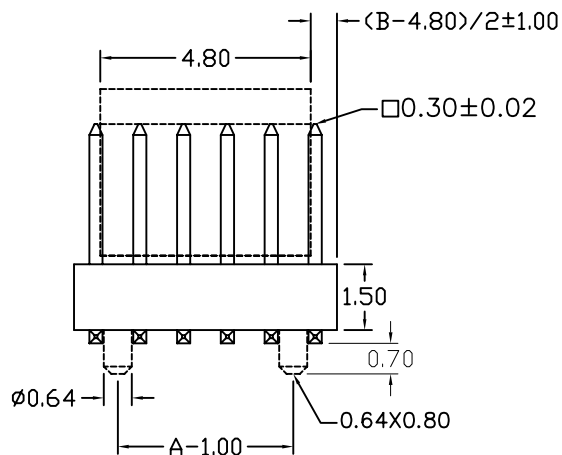
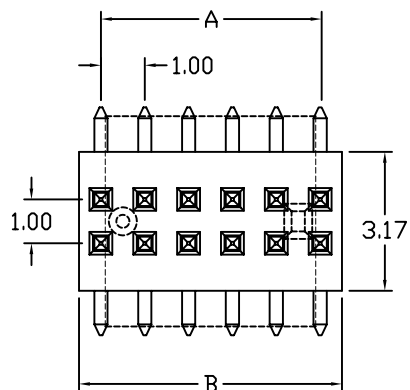


No. of Contacts	DIMENSIONS		REMARK (註)
	A	B	
6	2.00	3.00	○
8	3.00	4.00	○
10	4.00	5.00	○
12	5.00	6.00	○
14	6.00	7.00	○
16	7.00	8.00	○
18	8.00	9.00	○
20	9.00	10.00	○
22	10.00	11.00	○
24	11.00	12.00	○
26	12.00	13.00	○
28	13.00	14.00	○
30	14.00	15.00	○
32	15.00	16.00	○
34	16.00	17.00	○
36	17.00	18.00	○
38	18.00	19.00	○
40	19.00	20.00	○
42	20.00	21.00	○
44	21.00	22.00	○
46	22.00	23.00	○
48	23.00	24.00	○
50	24.00	25.00	○
52	25.00	26.00	○
54	26.00	27.00	○
56	27.00	28.00	○
58	28.00	29.00	○
60	29.00	30.00	○
62	30.00	31.00	○
64	31.00	32.00	○
66	32.00	33.00	○
68	33.00	34.00	○
70	34.00	35.00	○
72	35.00	36.00	○
74	36.00	37.00	○
76	37.00	38.00	○
78	38.00	39.00	○
80	39.00	40.00	○
82	40.00	41.00	○
84	41.00	42.00	○
86	42.00	43.00	○
88	43.00	44.00	○
90	44.00	45.00	○
92	45.00	46.00	○
94	46.00	47.00	○
96	47.00	48.00	○
98	48.00	49.00	○
100	49.00	50.00	○

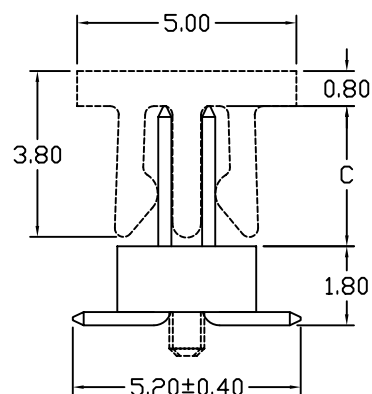

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

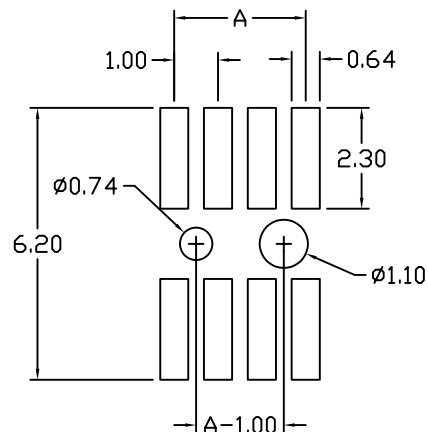

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: $-40^{\circ}\sim+105^{\circ}\text{C}$
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 (L.C.P)
 Color : Black

Finish: Tin, Gold plated
 ◎Standard: Gold flash all over

C "REMARK(備註)"		
1.90	○	
2.00		
4.00	○	
3.40		
4.50		
1.60	○	
3.20	○	
3.00		
3.80		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
 .X ± 0.25
 .XX ± 0.20
 .XXX $\pm$
 ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

H10-V18PxxC-2Xxx-LF
 SERIES POST 180°SMT HIGH 1.8mm CAP 19:CONTACT 1.9mm 32:CONTACT 3.2mm
 LEADFREE 2X03:06 WAY 2X50:100 WAY

DESCRIPTION: 1.0X1.0mm SMD HEADER