
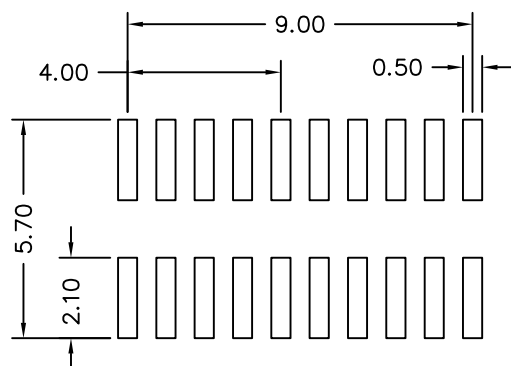
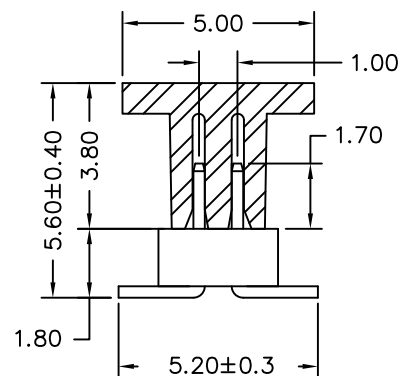
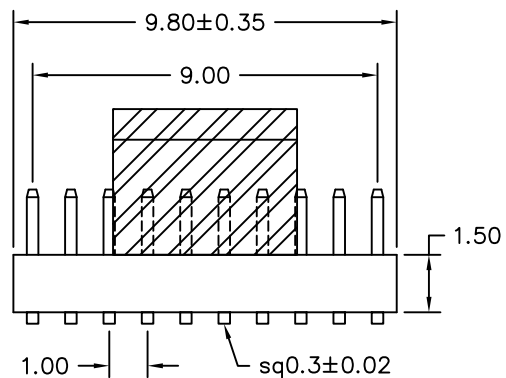


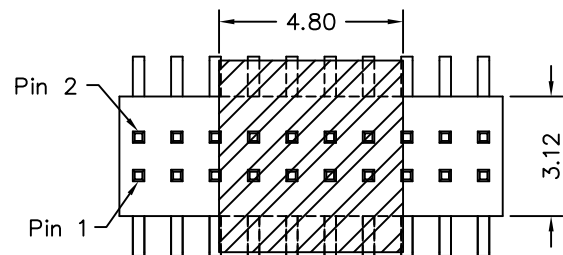

Recommended P.C.B Layout

MATERIAL

Insulator: NY46

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.25
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

H10-V18X17C-2X10-LF
SERIES | | | | LEADFREE
| | | | 20 WAY
| | | | CAP
180°SMT | | | | CONTACT 1.70mm
| | | | NON POST
| | | | HIGH 1.80mm

DESCRIPTION: PIN HEADER 1.0*1.0mm
SMT S/T TYPE, DUAL ROWS HEIGHT=1.5mm,CAP+TUBE