

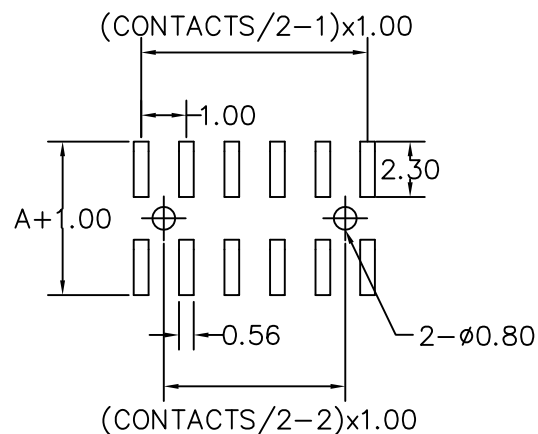
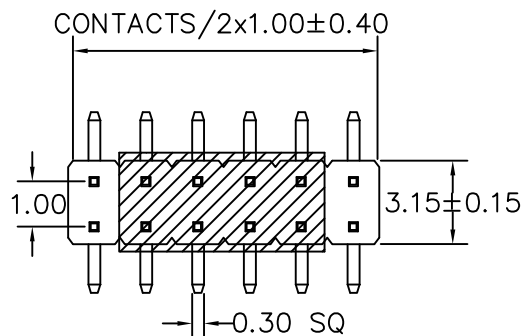


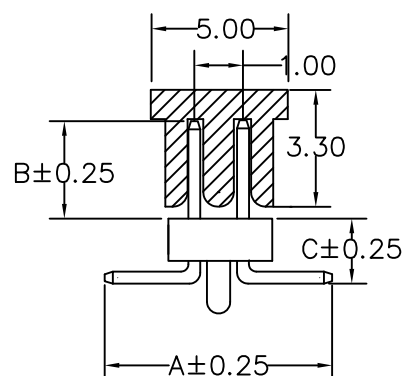

RECOMMENDED P.C.B LAYOUT

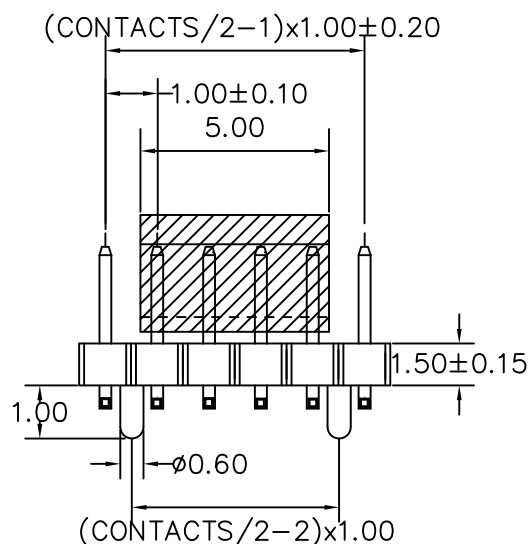

A: 5.20 mm B: 1.80 mm C: 2.00 mm

CONTACTS	
2X3	2X15
2X4	2X16
2X5	2X17
2X6	2X18
2X7	2X19
2X8	2X20
2X9	2X21
2X10	2X22
2X11	2X23
2X12	2X24
2X13	2X25
2X14	

MATERIAL

HOUSING : NYLON-6T,UL94V-0
CONTACT : COPPER ALLOYS
PLATED : GOLD-FLASH
COLOR : BLACK

SPECIFICATION

CURRENT: 1A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 5000 MEGAOHMS MIN
DIELECTRIC STRENGTH : 1000 VAC MIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

H10-V20P18C-2Xxx-LF
SERIES
180° SMT
HIGH 2.0mm
LEADFREE
2X03:06WAY
2X25:50WAY
CAP
CONTACT 1.8mm
POST

DESCRIPTION: