
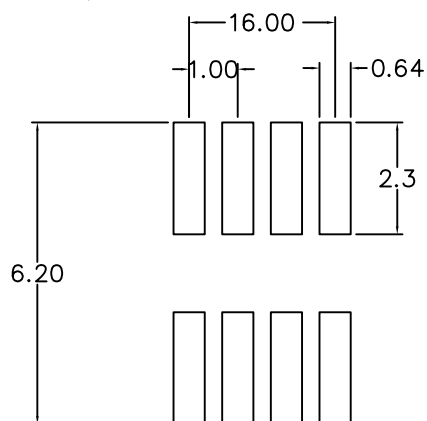




Recommended PCB Layout (PCB TOLERANCE ± 0.05)

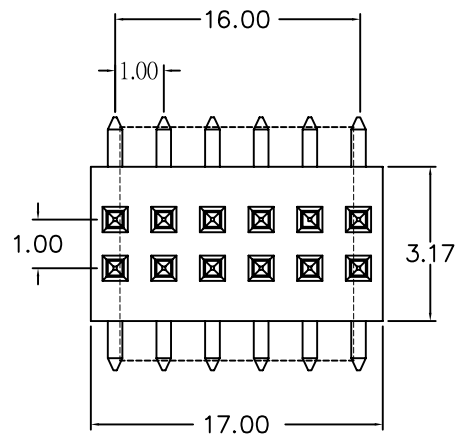

SPECIFICATIONS

Current Rating:	1 Amp
Insulator resistance:	5000 Megohms min.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40°~+105°C
Max Processing Temp:	230° for 30 seconds
Contact Material:	Copper alloy
Insulator Material:	High Temperature Thermoplastic, UL 94V-0(L.C.P)
	Color : Black

Finish: Tin, Gold plated
 ◎ Standard: Gold flash all over

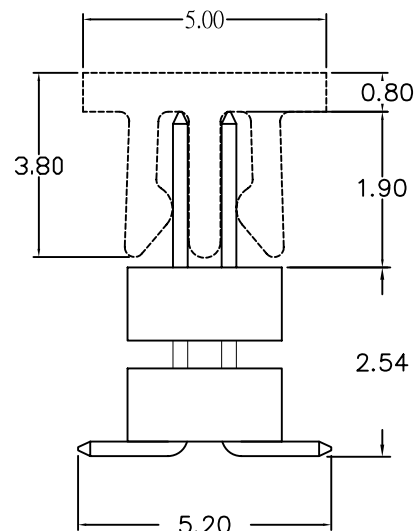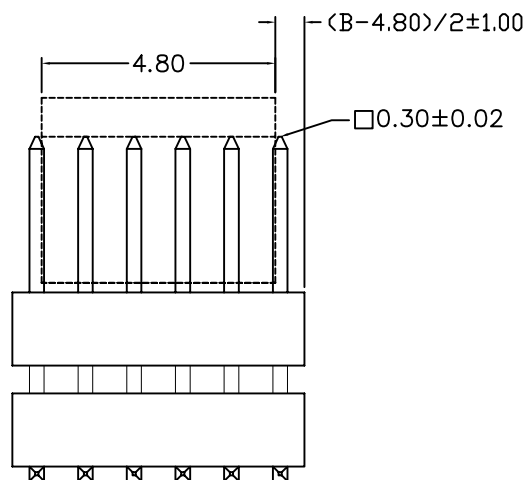

C "REMARK(備註)"		
1.90	○	
2.00		
4.00	○	
3.40		
4.50		
1.60	○	
3.20	○	
3.00		
3.80		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

H10S-V025X19C-2X17-LF
 SERIES 180°SMT CAP CONTACT 1.9mm
 34 WAY LEADFREE
 NON POST HIGH 2.54mm

DESCRIPTION: 1.0X1.0mm SMD HEADER