
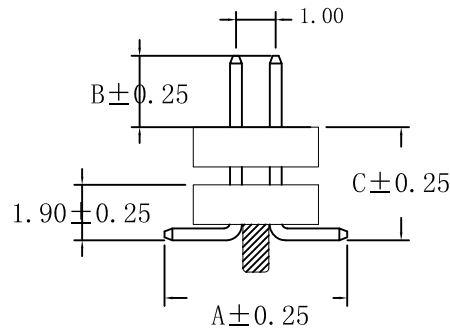


RECOMMENDED P. C. B LAYOUT

| CONTACTS | |
|----------|------|
| | 2×21 |
| 2×2 | 2×22 |
| 2×3 | 2×23 |
| 2×4 | 2×24 |
| 2×5 | 2×25 |
| 2×6 | 2×26 |
| 2×7 | 2×27 |
| 2×8 | 2×28 |
| 2×9 | 2×29 |
| 2×10 | 2×30 |
| 2×11 | 2×31 |
| 2×12 | 2×32 |
| 2×13 | 2×33 |
| 2×14 | 2×34 |
| 2×15 | 2×35 |
| 2×16 | 2×36 |
| 2×17 | 2×37 |
| 2×18 | 2×38 |
| 2×19 | 2×39 |
| 2×20 | 2×40 |

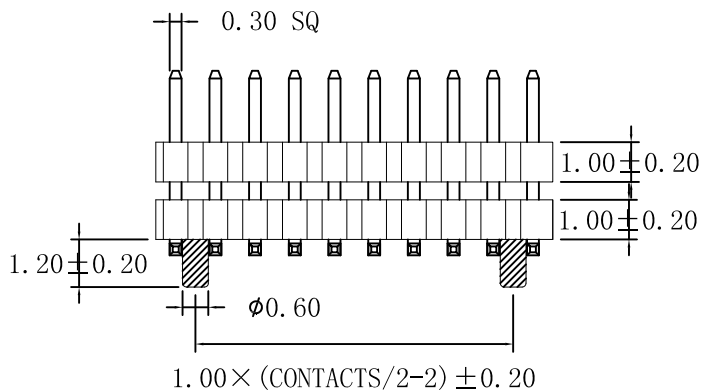

A: 4.60 mm B: 1.80 mm C: 2.85 mm

MATERIAL

HOUSING: NY6T, UL94V-0
 CONTACT: COPPER ALLOYS
 PLATED : GOLD-FLASH
 COLOR : BLACK

SPECIFICATION

CURRENT : 1A
 OPERATING TEMPERAURE : -40° C TO +105° C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 500 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 200 V AC MIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

H10S-V028P18-2Xxx-LF

SERIES | | | LEADFREE
 | | | 2X02:04 WAY
 | | | 2X40:80 WAY
 180°SMT | | CONTACT 1.8mm
 | | POST
 | | HIGH 2.85mm

DESCRIPTION: PIN HEADER 1.00PH SMT+POST H:1.00 2*XXP

煜倫股份有限公司

www.morethanall.com