


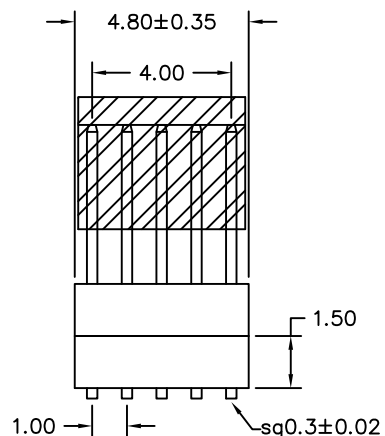


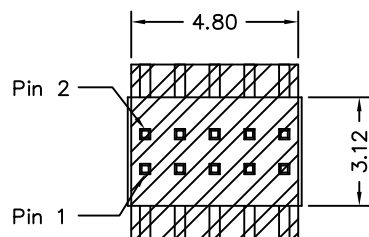

Recommended P.C.B Layout

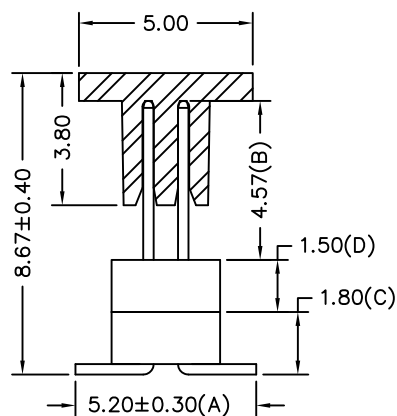

MATERIAL

Insulator : NY46

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

H10S-V033X45C-2X05-LF
 SERIES | | | | LEADFREE
 | | | | 10 WAY
 | | | | CAP
 180°SMT | | CONTACT 4.57mm
 | | NON POST
 | | HIGH 3.30mm

DESCRIPTION: PIN HEADER 1.0*1.0mm
 SMT S/T TYPE, DUAL ROWS HEIGHT=1.5mm CAP+TUBE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.25
 .XXX ±
 ANG ± 3°