
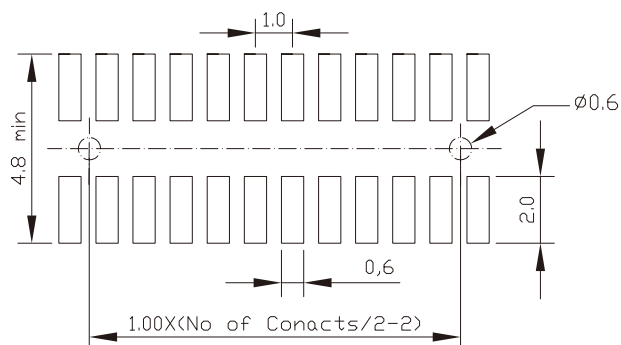
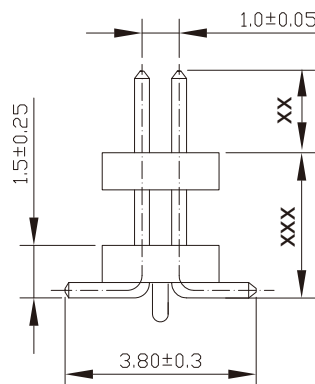
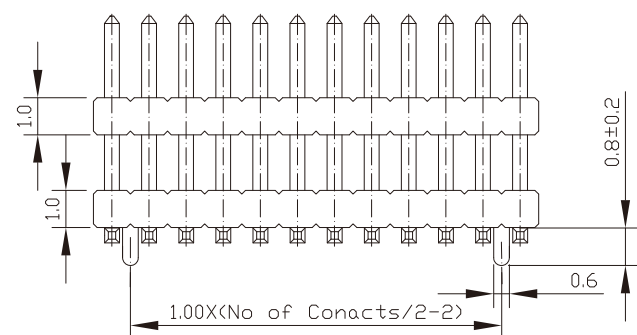


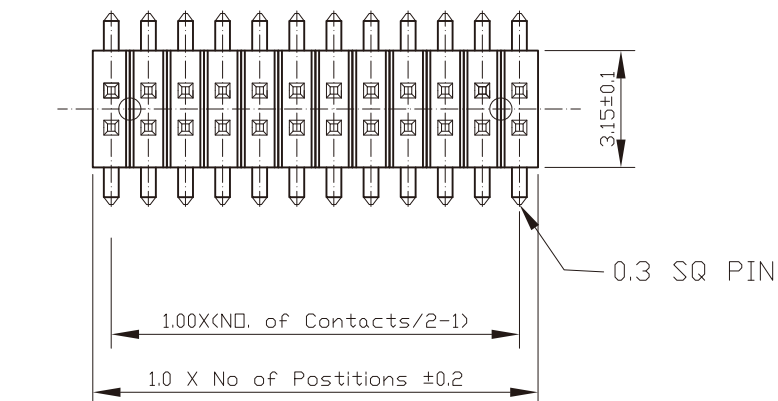

Specifications

Current Rating : 1 Amp

Insulator Resistance : 1000 Meghms min.

Contact Resistance : 20 m ohms min.

Dielectric Withstanding : AC 300V

Operating Temperature : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Material : Brass

Insulator Materal : Polyester, UL 94V-0

Standard : L.C.P

Contact Plated : See Option / Standard: Full Gold

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

ORDER INFORMATION

H10S-VxxxPxx-2Xxx-LF

SERIES

180°SMT

125:HIGH 12.5mm

LEADFREE

2X02:04 WAY

2X50:100 WAY

18:CONTACT 1.8mm

POST

DESCRIPTION: 1.0mm X 1.0mm PIN HEADER, DUAL ROW, STRAIGHT, SMT TYPE