

SPECIFICATIONS

Current Rating:

3 Amp

Voltage Rating:

230V

Insulator resistance:

5000 Megohms Min.

Contact Resistance:

20 m ohms Max.

Dielectric withstanding:

AC 500V/minute

Operating Temperature:

-25°~+85°C(PBT)

-40°~+105°C(6T, 9T)

Contact Material:

Brass

Insulator Material:

Polyester UL94V-0

Standard Color: Black





Finish:

Gold, Tin or Duplex plated

Duplex plated:

Gold plated on contact area

Tin on solder area

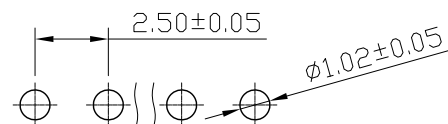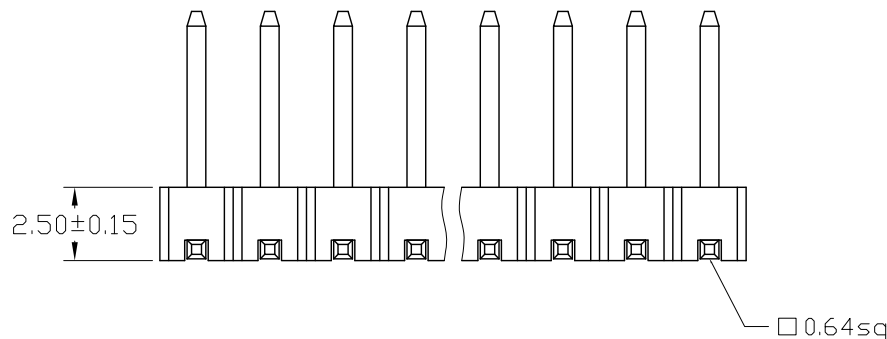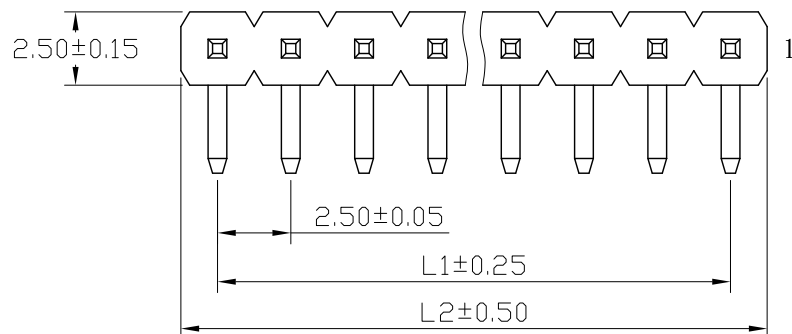

RECOMMENDED P. C. B. LAYOUT

Cir- cuits	Dimension mm	
	L1	L2
2	2.50	5.00
3	5.00	7.50
4	7.50	10.00
5	10.00	12.50
6	12.50	15.00
7	15.00	17.50
8	17.50	20.00
9	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00
17	40.00	42.50
18	42.50	45.00
19	45.00	47.50
20	47.50	50.00
21	50.00	52.50
22	52.50	55.00
23	55.00	57.50
24	57.50	60.00
25	60.00	62.50
26	62.50	65.00
27	65.00	67.50
28	67.50	70.00
29	70.00	72.50
30	72.50	75.00
31	75.00	77.50
32	77.50	80.00
33	80.00	82.50
34	82.50	85.00
35	85.00	87.50
36	87.50	90.00
37	90.00	92.50
38	92.50	95.00
39	95.00	97.50
40	97.50	100.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

H25-RL2500xxyy-1Xxx-LF
SERIES
DIP 90°
LOW
BASE 2.5mm
DIP 30:3.0mm
CONTACT 35:3.5mm
LEADFREE
1X02:02WAY
1X40:40WAY

DESCRIPTION: