


Recommended P.C.B.Layout  
(Tolerance:±0.05)

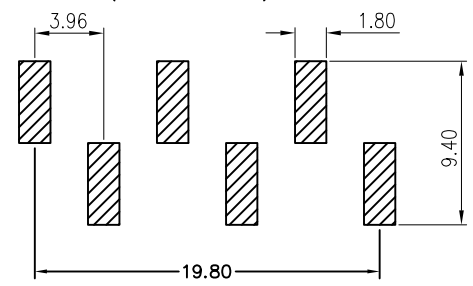

Specifications  
 Current Rating: 7.9Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 1500V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

Materials  
 Contact Material: Brass  
 Insulation Material: LCP, UL 94V-0  
 PLATING:

50μ" Nickel UNDER PLATING ALL OVER,  
 100μ" Matte Tin PLATING(FREE LEAD),

**RoHS Compliant**

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ±  
 ANG ± 3°

P PROJECTION

照片框

ORDER INFORMATION

H39-V57X104C-1X06R-LF  
 SERIES | | | | | LEADFREE  
 180°SMT | | | | | R TYPE FOOT  
 HIGH 5.73mm | | | | | 06 WAY  
 CAP | | | | | CONTACT 10.45mm  
 NON POST

DESCRIPTION: PH3.96 SMT"B" H=3.18W=6.35 CAP+T/R