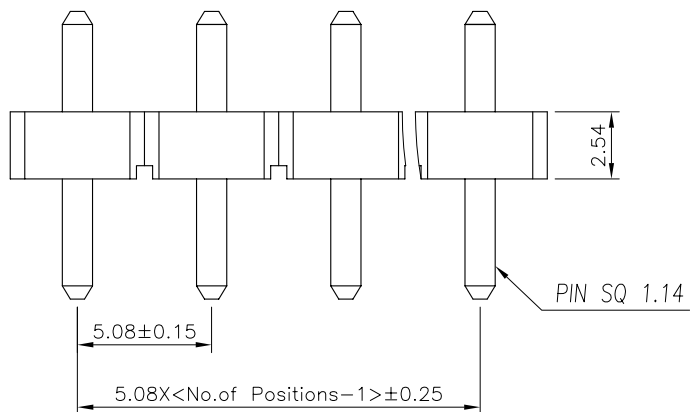



Recommended P.C.B. Layout  
(Tolerance:0.05mm)

#### Specifications

Current Rating: 7.9Amp  
Insulation Resistance: 5000MΩ Min.  
Dielectric Withstanding: 1500V AC/DC  
Contact Resistance: 20mΩ Max.  
Operating Temperature:-55°C to +125°C

#### MATERIAL:

-HOUSING: High Temperature Thermoplastic,  
UL 94V-0 LCP  
or the equivalent material   
-Contact: Brass

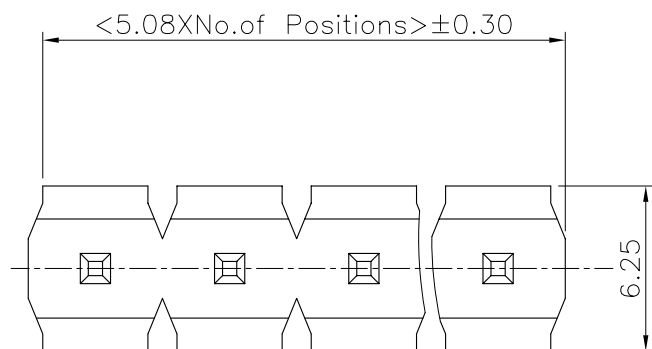

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X. ± 0.30  
.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.10  
ANG ±

照片框

#### ORDER INFORMATION

H51-D25038045-1Xxx-LF  
SERIES | | | | LEADFREE  
DIP180° | | | | 1X02:02WAY  
CONTACT 3.80mm | | | | 1X20:20WAY  
BASE 2.5mm

DESCRIPTION: