


Recommended P.C.Board Layout
(Tolerance:0.05mm)



Specifications

Current Rating: 7.9Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 1000V AC



Contact Resistance: 30mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass

△ Insulator Material: High Temperature Thermoplastic,
UL 94V-0 LCP or the equivalent material

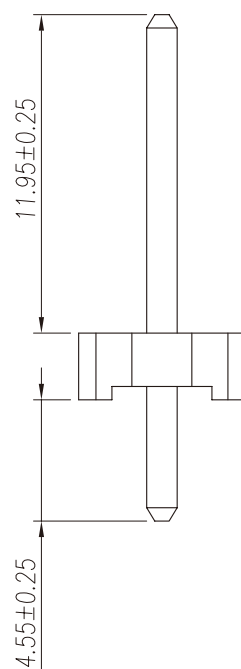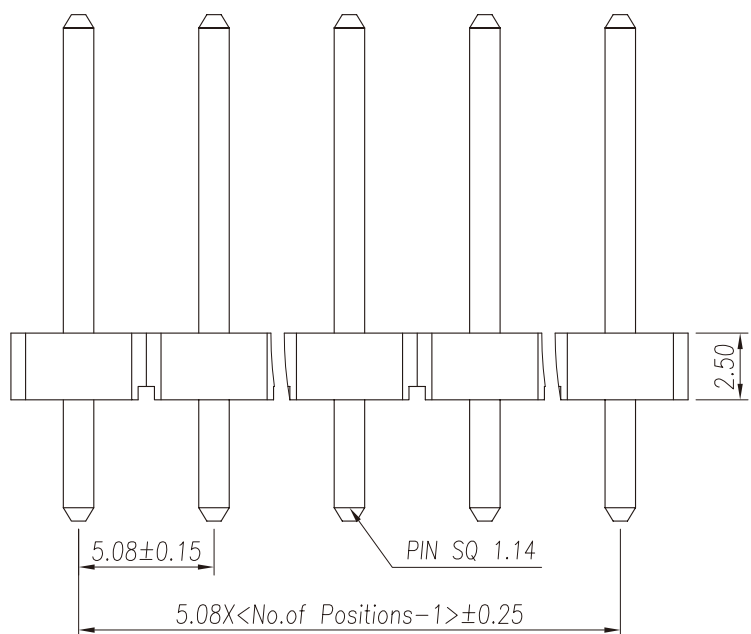

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

P PROJECTION

照片框

ORDER INFORMATION

H51-D25119045-1Xxx-LF

SERIES

DIP180°

CONTACT

1X02:02WAY

1X20:20WAY

DIP 4.55mm

BASE 2.5mm

LEADFREE

CONTACT 11.95mm

DESCRIPTION: