

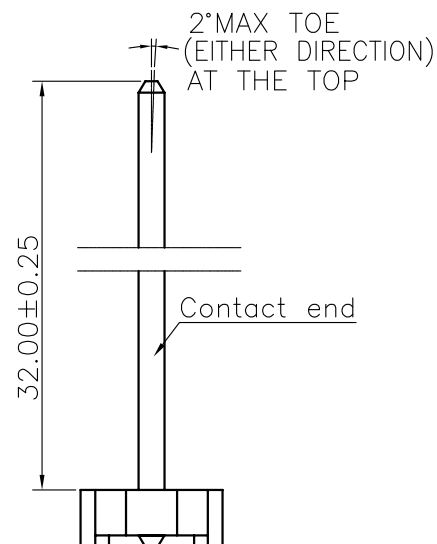
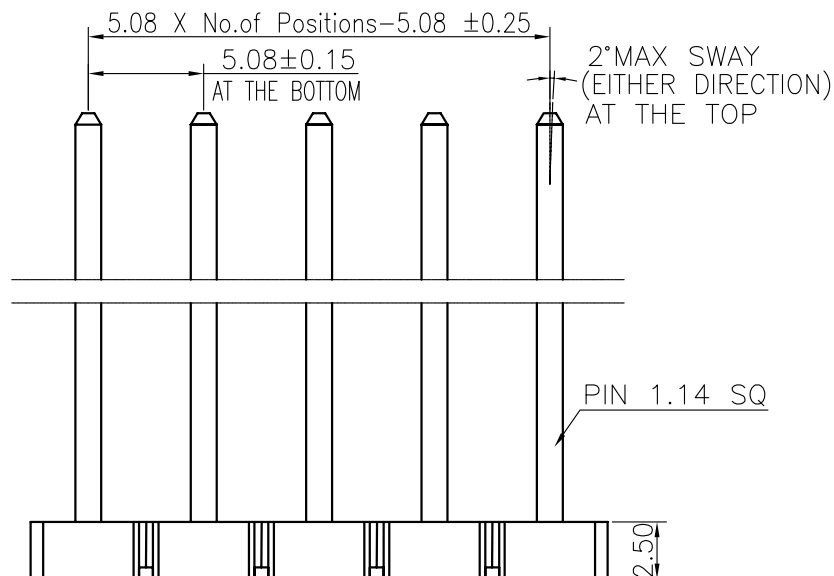


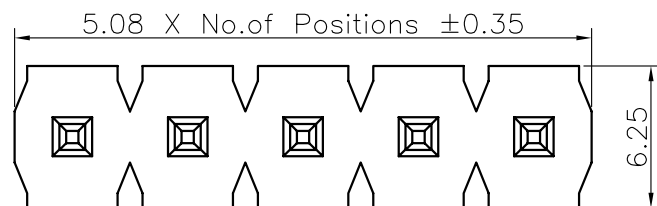

Specifications
 Current Rating:7.9Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:1000VAC
 Contact Resistance:30mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material:High Temperature
 Thermoplastic, UL 94V-0 LCP
 or the equivalent material

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)



RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

H51-D25320000-1Xxx-LF
 SERIES LEADFREE
 1X02:02WAY
 1X20:20WAY
 DIP180°
 BASE 2.5mm CONTACT 32.00mm

DESCRIPTION: 5.08 PIN HEADER SINGLE ROW DIP TYPE CONNECTOR