
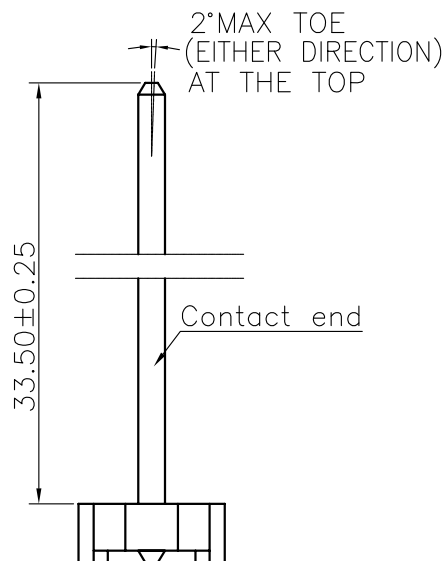
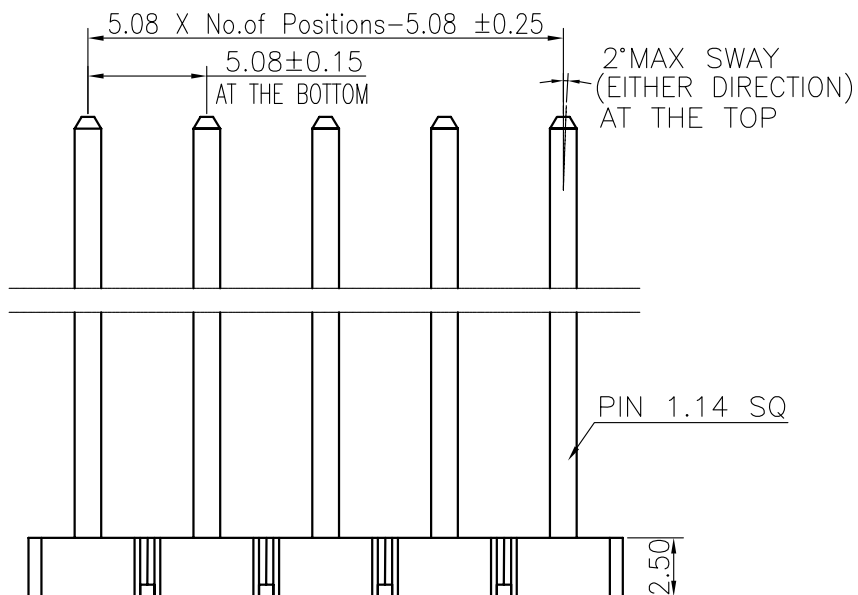


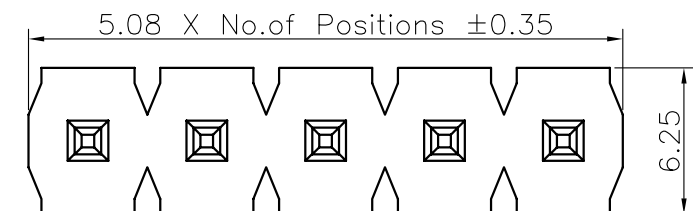

Specifications

Current Rating:7.9Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:1000VAC

Contact Resistance:30mΩMax.

Operating Temperature:-40°C to +105°C

Materials


Contact Material:Brass

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 LCP

or the equivalent material

Recommended P.C.Board
Layout
(Tolerance:±0.05)



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30


.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION



ORDER INFORMATION

H51-D25335000-1Xxx-LF
SERIES | LEADFREE
DIP180° | 1X02:02WAY
CONTACT 33.5mm
BASE 2.5mm

DESCRIPTION: 5.08 PIN HEADER SINGLE ROW DIP TYPE CONNECTOR