


Recommended P.C.Board Layout
(Tolerance:0.05mm)



Specifications

Current Rating: 7.9Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 1000V AC



Contact Resistance: 30mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass

Insulator Material: Polyester UL94V-0
LCP

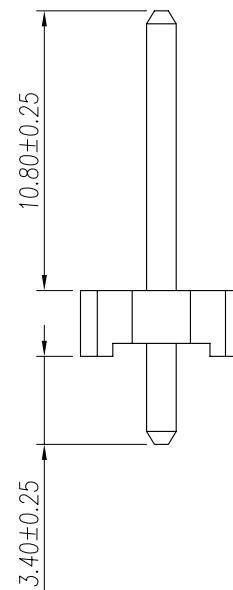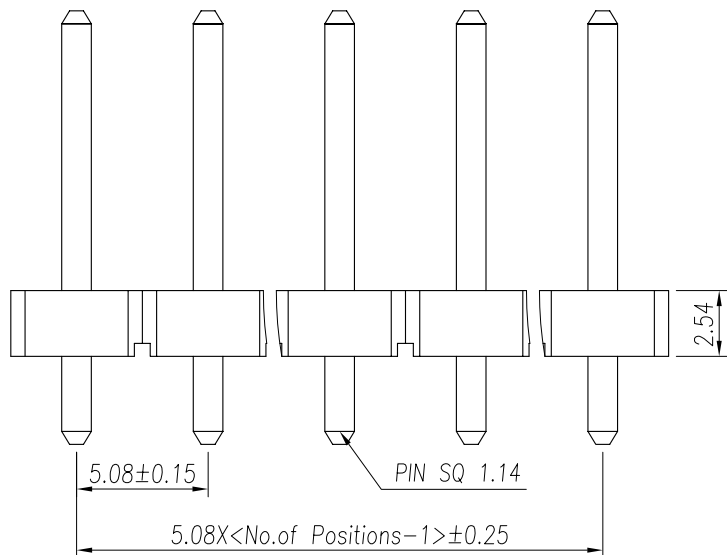

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

H51-D25xxxxyy-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X20:20WAY
DIP180° | 045:DIP 4.50mm
BASE 2.5mm | 038:CONTACT 3.80mm

DESCRIPTION: