
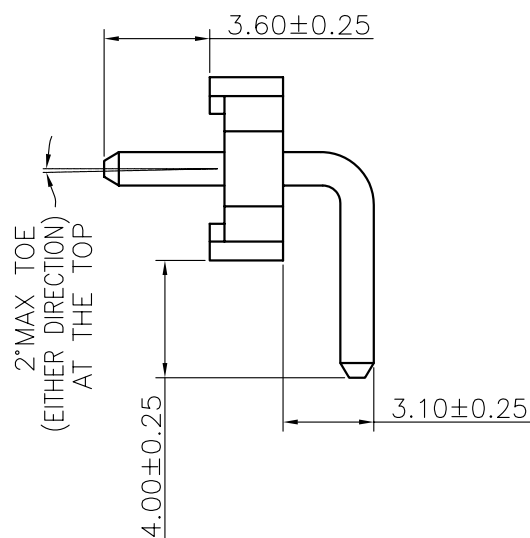
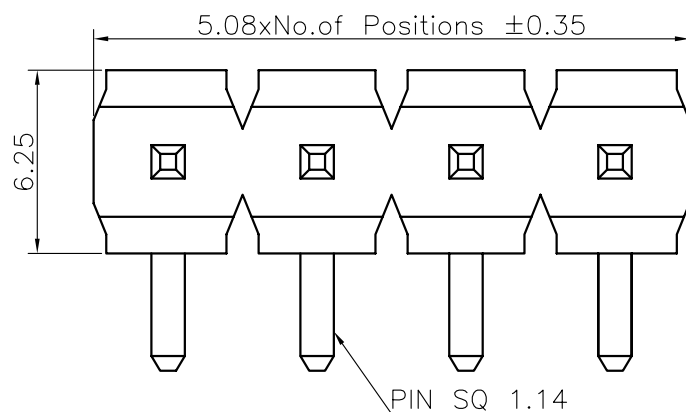


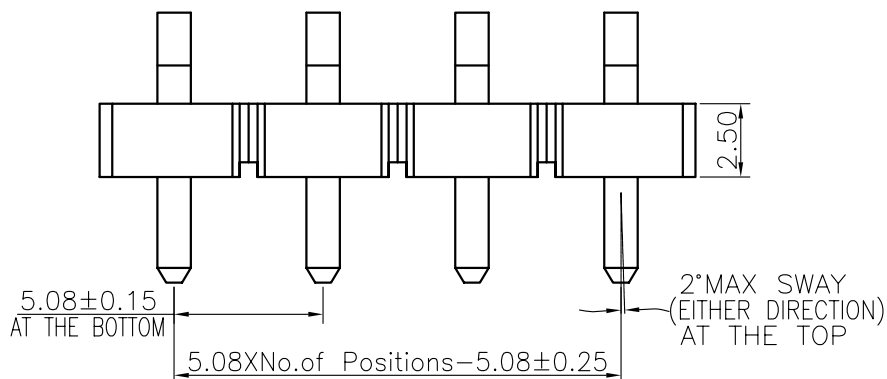

Specifications

Current Rating:7.9Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:1000VAC

Contact Resistance:30mΩMax.

Operating Temperature:-40°C to +105°C

Materials


Contact Material:Brass

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 LCP

or the equivalent material

Recommended P.C.Board
Layout
(Tolerance:±0.05)

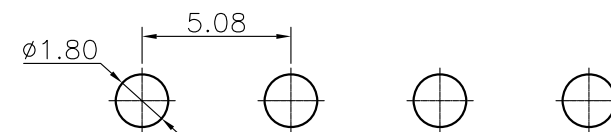

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

H51-RH2525040036-1Xxx-LF
SERIES HIGH DIP 90° BASE 2.54mm
CONTACT 3.6mm R/A 2.54mm
LEADFREE
1X02:02WAY
1X20:20WAY

DESCRIPTION: 5.08 PIN HEADER SINGLE ROW R/A TYPE CONNECTOR