
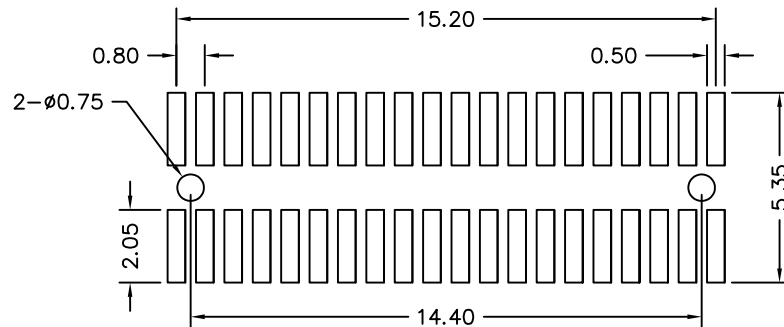
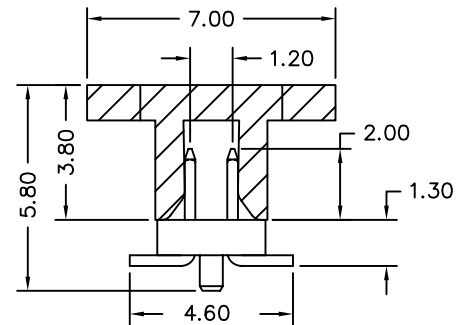
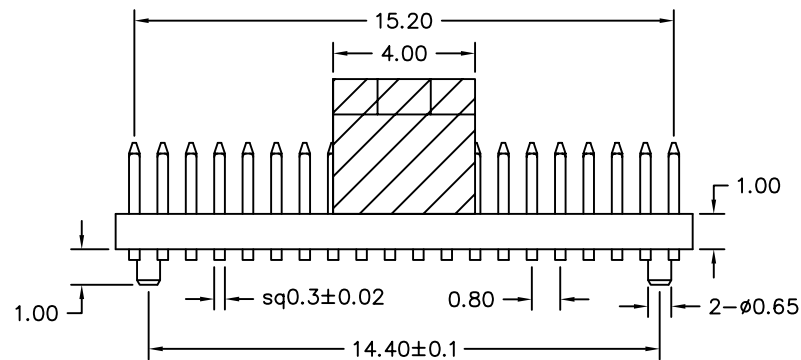


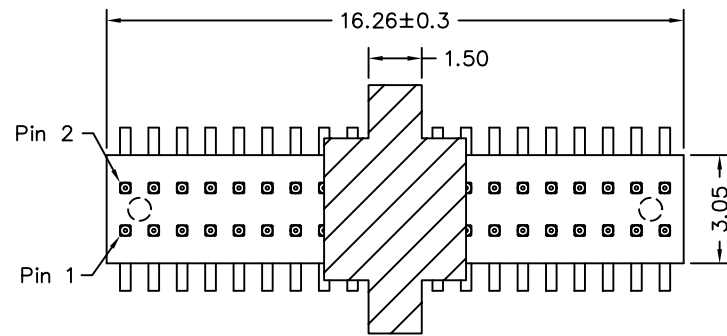

Recommended P.C.B Layout

MATERIAL
Contact Pin : Brass

SPECIFICATION
Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 15mΩMax.
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

H8-V13PC-2X20-LF
SERIES CAP POST HIGH 1.3mm 180°SMT
LEADFREE 40 WAY

DESCRIPTION: PIN HEADER 0.8*1.2mm SMT S/T TYPE, DUAL ROWS HEIGHT=1.0mm,CAP