
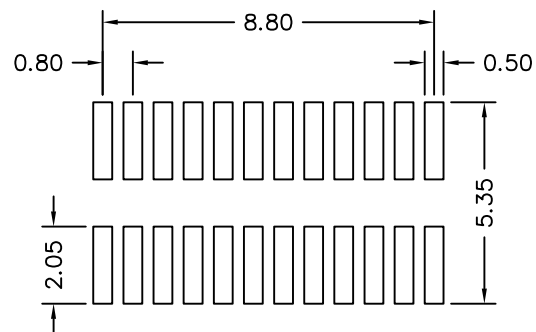
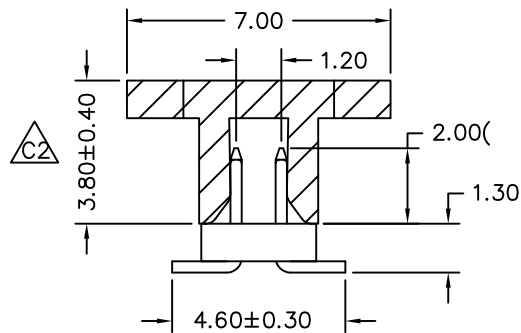
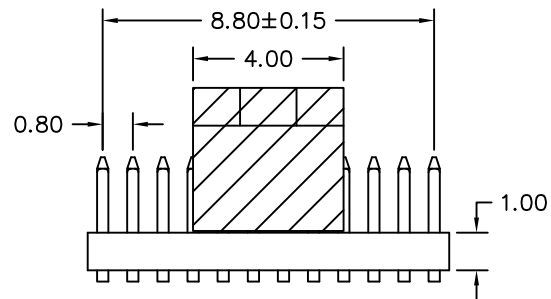


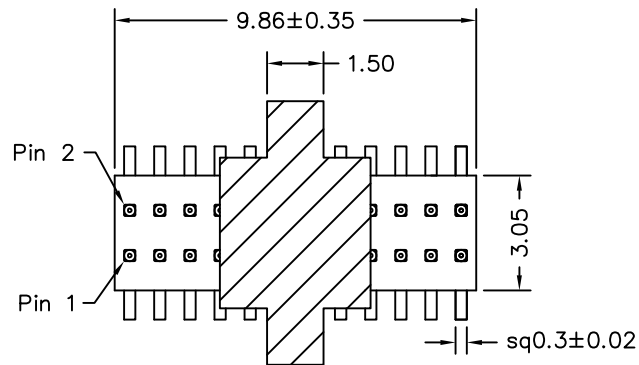

Recommended P.C.B Layout

MATERIAL
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 15mΩMax.
Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

H8-V13XC-2X12-LF
SERIES CAP 24 WAY LEADFREE
NON POST
HIGH 1.3mm
180°SMT

DESCRIPTION: PIN HEADER 0.8*1.2mm SMT S/T TYPE, DUAL ROWS HEIGHT=1.0mm,CAP