
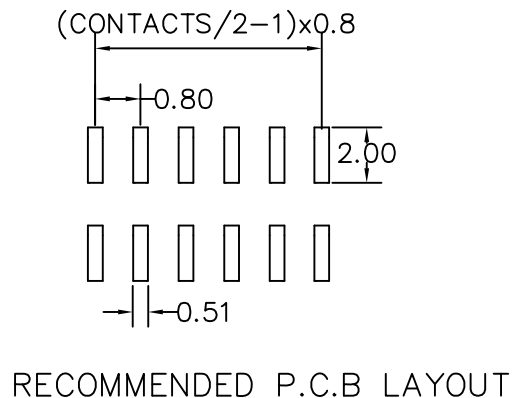


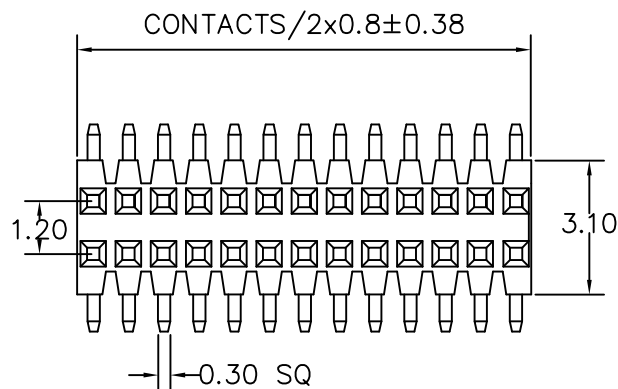

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION



CURRENT: 1A

OPERATING TEMPERATURE: -40°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 500V RMS

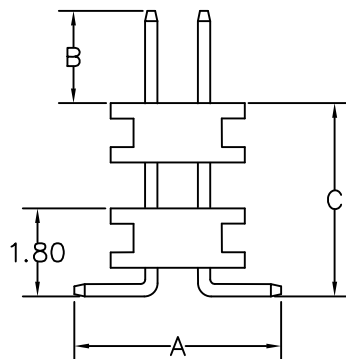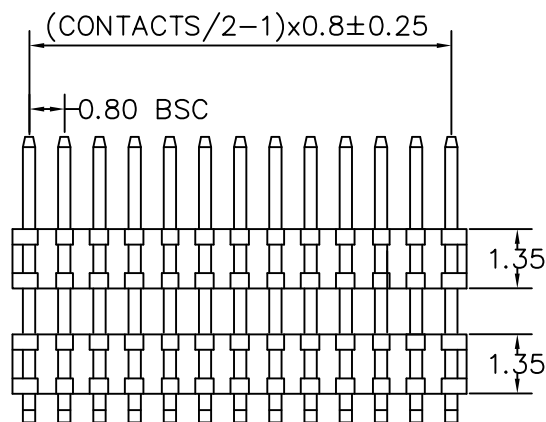

A: 4.60 mm B: 2.00 mm C: 5.50 mm

CONTACTS	2X14	2X27	2X40
2X2	2X15	2X28	2X41
2X3	2X16	2X29	2X42
2X4	2X17	2X30	2X43
2X5	2X18	2X31	2X44
2X6	2X19	2X32	2X45
2X7	2X20	2X33	2X46
2X8	2X21	2X34	2X47
2X9	2X22	2X35	2X48
2X10	2X23	2X36	2X49
2X11	2X24	2X37	2X50
2X12	2X25	2X38	
2X13	2X26	2X39	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

H8S-V055X20-2Xxx-LF

SERIES | CONTACT 2.0mm | LEADFREE

NON POST | 2X02:04 WAY

HIGH 5.5mm | 2X50:100 WAY

180°SMT

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com