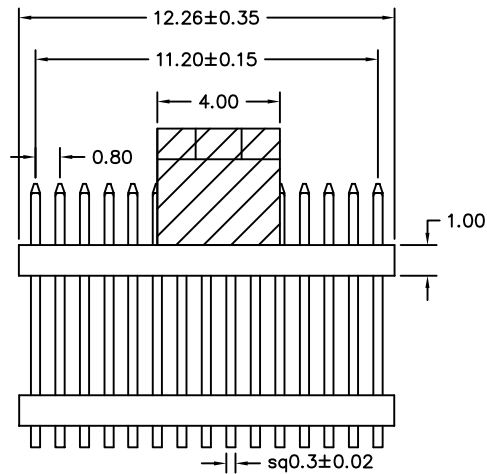
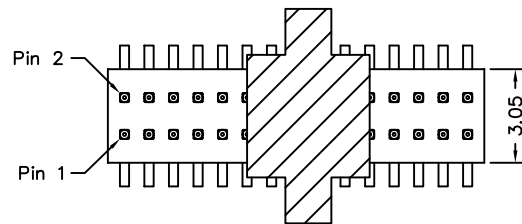


Recommended P.C.B Layout

## MATERIAL

Contact Pin : Brass

## SPECIFICATION


Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

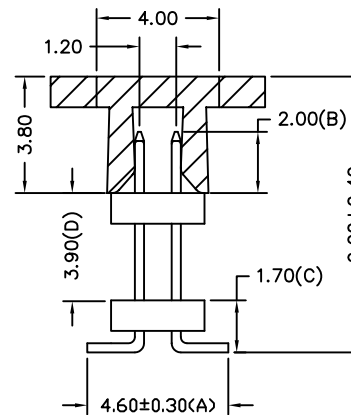

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±

DATE

.XXX, ±

ANG, ±

SIZE A4

PPOJECTION

## ORDER INFORMATION

H8S-V056X20C-2X15-LF  
 SERIES | CAP | 30 WAY | LEADFREE  
 180°SMT | NON POST | CONTACT 2.0mm  
 HIGH 5.6mm

DESCRIPTION: PIN HEADER 0.8\*1.2mm  
 SMT S/T TYPE, DUAL ROWS DUAL INSULATORS, HEIGHT=1.0mm CAP

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com